

>> Product Specification



>> CKO-LED-6H709-A Amber Strobe 6 LED Slim




>> KEY FEATURES

- Colour: Amber
- Fixing: Bolt
- Approval: ECE R10 / R65
- Voltage: 12-24V
- IP Rating: IP69K
- LEDs: 6
- Patterns: 21 Selectable Flash Patterns
- Dimensions: 113mm x 29mm x 10mm
- Tough polycarbonate lens with UV resistance
- Die-cast Aluminium base with heat dissipation
- Foam gasket
- Reverse polarity protection
- Synchronise up to 14 strobes
- Clear Lens
- -30°C to +60°C operating temperature

>> Wiring Information

- **Red:** Power
- **Black:** Ground
- **Yellow:** Pattern Programming / Synchronisation or alternative flash
- **White:** Dimming - connect to ground to activate
- **Grey:** Cruise mode - connect to ground to activate

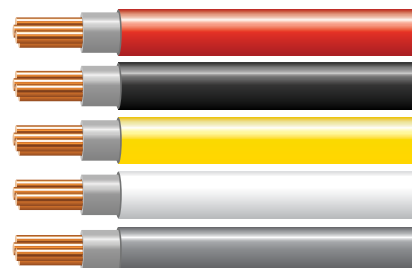

FOR MORE INFORMATION, CONTACT OUR SALES TEAM.

T: 020 8863 8333 (OPT1) • **E:** sales@c-ko.co.uk • **W:** www.c-ko.co.uk

Product Specification



Amber Strobe 6 LED Slim

Wiring Information

(1) Pattern Selection: Apply yellow to black wire. Less than 1 second for next pattern. 3-5 seconds for previous pattern. 6-9 seconds to reset back to pattern 1.

(2) Synchronisation: When ungrouped, connect the yellow wire of all strobes together to achieve synchronisation.

(3) Simultaneous or Alternating Flash + Reset Group: Apply yellow to black wire for simultaneous or alternating flash.

Step 1: Set Group A: connect yellow wire of all Group A's heads together. Apply to black wire for 16-19 seconds. Group A is now set. (Group A will not light up at this time, which is the default status.)

Step 2: Set Group B: connect yellow wire of all Group B's heads together. Apply to black wire for 21-24 seconds. Group B is now set. (Group B will light up and can change flash pattern after power off and on; and will follow Group B's flash pattern when connecting the yellow wire of Group A and Group B together.)

Step 3: Use Group A/B: connect yellow wire of Group A and Group B together, apply it to black wire for 11-14 seconds for alternating flash. Apply it to black wire for 11-14 seconds again to go back to simultaneous flash. (If the time exceeds 14 seconds, all heads will NOT light up. Repeat steps 1 & 2.)

Resetting Groups:

Connect yellow wire of Group A and Group B's strobes together. Apply to black wire for 21-24 seconds, then power off and on. Head lighting up means that the resetting was successful. (Then can be used individually or can be grouped)

Flash Pattern Information

Tap yellow wire to black for less than 1 second for next pattern, 1-3 seconds for previous pattern or over 5 seconds to return to the first pattern.

- | | |
|-------------------|-------------------------------|
| 1. Single R65 | 12. Single - Split |
| 2. Single Slow | 13. Double - Split |
| 3. Double R65/SAE | 14. Quad - Split |
| 4. Double Slow | 15. Octa - Split |
| 5. Triple | 16. Single - Split Accelerate |
| 6. Quad Fast R65 | 17. Double - Split Accelerate |
| 7. Quad Slow | 18. SOS |
| 8. Octa Fast | 19. Cycle (1,8,3,9,4,18) |
| 9. Octa Slow | 20. Cycle (2,7,9,11,14,16) |
| 10. Twelve | 21. Steady On |
| 11. Sixteen | |



Warning: Avoid looking directly at LEDs while they are in operation. Doing so may result in temporary vision impairment or permanent eye damage.

FOR MORE INFORMATION, CONTACT OUR SALES TEAM.

T: 020 8863 8333 (OPT1) • **E:** sales@c-ko.co.uk • **W:** www.c-ko.co.uk