



WELCOME >>

The Vehicle Safety Experts

CKO have been involved in the design, development, and distribution of vehicle safety products and solutions for over 40 years. We work directly with established manufacturers in the UK, Europe, and Far East to meet the safety requirements of our customers in the commercial vehicle and automotive industries. CKO hold an extensive range of products in stock; with competitive lead times to meet specific customer requirements.

HAVE CONFIDENCE IN YOUR PURCHASE

Our experienced sales team are on hand to offer you tailored support to meet your needs, and the requirements of your customers. With extensive knowledge regarding DVS and FORS standards, as well as other forms of compliance, CKO always demonstrate clear capability when it comes to facilitating your regulatory standard queries. Our dedicated technical helpline offers long-term support for our products. We offer high-quality products, value for money, and great service. Customer satisfaction is at the core of our business.



Visit our website at www.c-ko.co.uk

Q Address

CKO Vehicle Safety Experts, 6 Lumsdale Road, Cobra Court, Trafford Park, Manchester, M32 0UT

Phone

Sales: 0208 863 8333 (Opt 1)
Accounts: 0208 863 8333 (Opt 2)
Technical: 0208 863 8333 (Opt 3)

🔀 Email

sales@c-ko.co.uk accountsreceivable@c-ko.co.uk accountspayable@c-ko.co.uk

CONTENTS >>

Category 1 - Introduction	
About Us Warranty T&Cs Compliance DVS Package 360° Package Live View Software Datalive Software	3 4 5 7 9 11 15
Category 2 - Dash Cameras	
Dash Cameras Dash Camera Accessories	17 21
Category 3 - DVR	
DVR Overview Advanced AI DVR Device Comparison Chart DVR Devices DVR Packages DVR Accessories	22 23 25 26 27 30
Category 4 - Cameras	
Cameras AHD Cameras FORS Packages Brake Light Cameras Van Package Number Plate Cameras D1 Cameras	33 35 43 44 51 52 53
Category 5 - Monitors	
Monitors Monitor/Camera Kits	59 63

Monitors	59
Monitor/Camera Kits	63
Mirror Monitors	65
Motorhome Package	70
Custom Cables	71

Parking Sensors 72

Category 7 - Alarms & Lighting

Warning Alarms

75

Category 8 - Heated Seats	
Heated Seats	78
Category 9 - Accessories	
Control Units Brackets Cables Suzi Kit Cables	80 82 84 89
Category 10 - Consumables	
Consumables	96
Category 11 - Cash Boxes	
Cash Boxes	101
Category 12 - Lighting	
Beacons Light Bars Strobes Work Lights Interior Lighting Warning Lights	103 110 118 125 129 135
Category 13 - Our Team	

Same Day Collection

Installation

Meet The Team

ODUCT CATALOGUE
PRODUCT CATALOGUE

136

137



VEHICLE SAFETY EXPERTS

For over 40 years, CKO have provided tailored innovative products and solutions to a variety of different industries; from Tier 1 OEMs to vehicle builders and distributors.

This accumulation of extensive expertise has enabled CKO to not only supply products, but to also design, develop and manufacture bespoke products, built to exceed our client's specifications. If your vehicles have complicated requirements, sought unique features, or have a difficult installation location, an off the shelf product may not be good enough. Our team works closely with clients to produce a solution that can be delivered on time and within budget.

CKO are often called upon by distributors and resellers alike to provide a wide range of cameras, monitors, DVRs, lighting, cable assemblies, bracketry, and software; all of which offer impressive functionality to solve customers' vehicle safety needs.

These products individually contribute when it comes to significantly reducing the likelihood of an incident, and therefore rducing the need for time-consuming (and costly) repairs. When combined, these products produce a complete system; allowing you to clearly observe the rear, front, and sides of your vehicle when reversing and manoeuvring.



AFFILIATED WITH





OUR SERVICE SUMMARY FOR BESPOKE PRODUCTS



TECHNICAL KNOW-HOW AND WARRANTY RETURNS

Buying from CKO brings you the additional reassurance of our in-house technical team. We thoroughly evaluate and test all our products before they go to market. This, together with our technical helpline, allows us to provide a full backup service to our customers who can have the confidence in our long-term support and warranty responsibilities.

WARRANTY TERMS AND CONDITIONS

CKO warrants all goods to be free from defect in material and workmanship in normal use, provided that they have been installed and operated in accordance with the instructions supplied. The start date of all warranties is the date of delivery to the purchaser, unless otherwise agreed in writing by CKO. The period during which the 12 or 24-month applies is stated above. CKO make no other warranty, express or implied, with respect to the goods, their marketability, quality, or fitness for any particular use or purpose. In particular, but without prejudice to the general provisions of the conditions of sale, no responsibility is assumed for incidental or consequential loss by reason of any warranty express or implied.

Full details of CKO's Terms and Conditions are contained on our website at www.c-ko.co.uk. CKO International Limited reserves the right to change terms, conditions, and specifications shown in this catalogue at any time. All Information within this catalogue was correct at time of going to print.

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE



YOUR FLEET COMPLIANCE IN TRUSTED HANDS

With over 40 years' experience, CKO is here to take the trouble out of meeting compliance standards. Thus ensuring that your fleet is safe for operation within the modern commercial vehicle world.

DVS COMPLIANCE

Transport for London's (TfL) Direct Vision Standard (DVS) Progressive Safe System (PSS) conditions are now in effect for all HGVs regardless of the star rating. Operators with vehicles weighing over 12 tonnes need to have the new HGV Safety Permit to be able to operate within and around Greater London. All HGVs need to apply for a permit to avoid facing a Penalty Charge Notice (PCN).

CKO have developed a PSS solution that is compliant with these updated standards; designed for aftermarket application into a wide range of vehicle makes and models. This kit protects vulnerable road users in an approach aligned to European Union and the United Nations Economic Commission for Europe (UNECE), namely R151 for Blind Spot Information System (BSIS) and R159 for Moving Off Information System (MOIS).

Find out more about our kit on pages 7 - 8.

FORS COMPLIANCE

The Fleet Operator Recognition Scheme (FORS) is a voluntary accreditation scheme that recognises safer, greener, and more efficient fleet operations. FORS Bronze, Silver, and Gold membership provides progressive accreditation, enabling Operators to achieve exemplary levels of best practice. FORS members stand out from the crowd, work to standards above the legal minimum, and have access to a wide range of exclusive benefits that provide a real competitive advantage.

FORS is relevant to commercial operators in the three classes of trucks, vans, and passenger carrying vehicles (PCVs). Specific measures apply to each class.

Trucks: commercial vehicles over 3.5 tonnes gross vehicle weight Vans: commercial vehicles of 3.5 tonnes gross vehicle weight or under PCVs: any vehicle with 8 or more passenger carrying seats

CKO can assist you in meeting all your FORS safety requirements, by offering a range of products and solutions that allow Fleet Operators to measure, monitor, and improve performance.

Find out more about our kit on page 43.

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk



Solutions For Safer, Greener and More Efficient Fleet Operations.

can place your trust in CKO. Our knowledgeable team compliant for operation within the modern commercial vehicle world.

Find out how we can help. Contact our team today to discuss our solutions for Bronze, Silver, or Gold FORS compliance.

Call 0208 863 8333 (Option 1)

With over 40 years' experience designing, developing, As associates of the Fleet Operator Recognition and distributing vehicle products and solutions, you Scheme, CKO can assist you in meeting all your FORS safety requirements by offering a range of solutions for can offer you tailored support to meet your required measuring, monitoring, and improving vehicle regulatory standards, ensuring that your fleet is performance - enabling Operators to achieve exemplary levels of best practice.









COMPLIANCE PACKAGES / DVS





Progressive Safety System



Our Solution

- Camera Monitoring Systems (CMS) / Blind Spot Information System (BSIS) A side Al camera on the near side of the vehicle aimed down to eliminate the blind spot, combined with a monitor situated on the near side pillar. Operational at all times under 20MPH.
- Moving Off Information Systems (MOIS) Another Al camera is fitted to the front of the vehicle to allow for the detection of VRUs for safe moving off.
- Left Turn Alarm Activated when the left turn signal is on. An additional button is also installed on the
 dash to stop the sounder activating at night.
- Warning Signage Prominently displayed on the vehicle.

Product Overview


Our Progressive Safe System (PSS) solution is designed for aftermarket application to a wide range of vehicle makes and models. In some cases, additional accessories in the form of brackets and camera spacers are required to allow for operational performance.

The core of the Blind Spot Information System (BSIS) and Moving Off Information System (MOIS) utilises Edge Artificial Intelligence Video Analytics. Allowing for the detection of vulnerable road users (VRUs) whilst ignoring street side furniture locally, without the delay associated with cloud-based Al systems.

Al cameras are installed on the front and side of the vehicle. Configurable detection zones are set using a removeable USB tool once cameras have been positioned and angled correctly onto the vehicle based upon our method statement and installation guidance. We recommend taking photographic evidence of the detection zones, using markers on the ground, to prove that the cameras have been configured. In events of complete power loss to the vehicle, the configuration remains consistent without need for recalibration.

COMPLIANCE PACKAGES / DVS



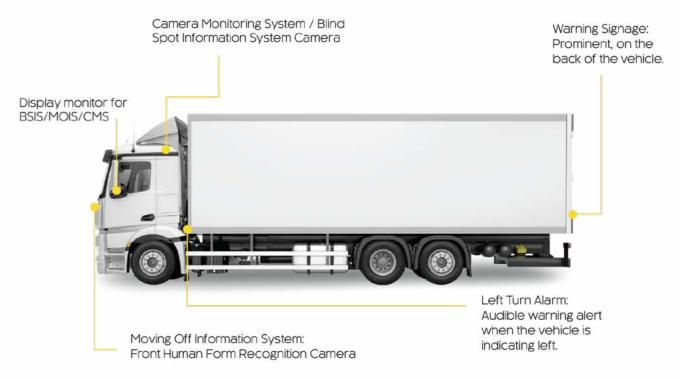


Testing and Approval

Backed by extensive trials and thousands of miles of real-world driving data, our system delivers precision in identifying VRUs. This minimises the risk of false alerts caused by roadside objects (such as traffic cones or parked vehicles) which are often misinterpreted by traditional sensor systems.

This dramatically reduces false positives and improves driver awareness, creating a safer and more seamless driving experience. Acting as an intelligent co-pilot, the human form recognition cameras serve as an extra pair of eyes, constantly monitoring the detection zone.

For your HGV Safety Permit application under the Direct Vision Standard (DVS), accurate documentation of the AI camera installation and calibration is mandatory. Equipment positioning and technical specifications must strictly follow the latest guidance from Transport for London (TfL).

At CKO, our team works diligently to stay ahead of evolving compliance standards. We are committed to keeping you informed and supported, ensuring that your fleet meets every requirement with confidence.

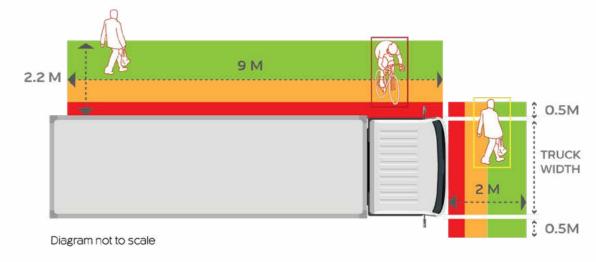

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk call 0208863833 PRODUCT CATALOGUE

COMPLIANCE PACKAGES / 360° Vision



PRODUCT OVERVIEW

The 360° 'Birds-Eye-View' camera package utilises four cameras, with one on each side of the vehicle to provide a complete top-down view of the entire vehicle. All cameras include ultra-wide-angle lenses, thus ensuring that their field of vision seamlessly overlaps at each corner of the vehicle. An ECU (Electronic Control Unit) is used to blend the four images together to produce the look-down view and a 'vehicle mask' is overlayed to illustrate the vehicle's positioning.


Once fitted, the system will require calibration to ensure that the correct view has been successfully configurated. This is a simple process to follow, in which the friendly and knowledgeable team at CKO will be happy to assist you. The system can be used with any vehicle type and size.



>> Our Solution

The 360° 'Birds-Eye-View' package consists of the following:

- 7" Monitor
- 4 ultra-wide-angle cameras (metal case, easy fit) and cables (1x18m, 2x10m & 1x5m)
- ECU
- Remote Control
- **Upgrade Options:**
- Digital Video Recorder
- Waterproof Monitor (ideal for Plant use)
- Side Sensors
- Turning Warning Alarm



COMPLIANCE PACKAGES / 360° Vision



>> How It All Works

The monitoring system is built to enhance vehicle safety and situational awareness. The primary view consistently presents a birds-eye perspective on the monitor. Meanwhile, the secondary view transitions between viewpoints based on the vehicle's manoeuvres, contingent upon the presence of the appropriate wiring configuration. While the optimal setup typically involves utilising a separate monitor dedicated to the 360° system, the flexibility exists to integrate it with the vehicle's existing monitor, facilitated by vehicle specific leads available upon request.



By effectively eliminating blind spots, particularly when driving in dense urban environments where visibility can be compromised, the system becomes an indispensable asset for enhancing safety on the road. The system features a plug-and-play design, with effortless connectivity to a DVR for recording footage from all cameras. This functionality is invaluable for protection against fraudulent insurance claims.

Core Benefits

- Effectively eliminates blind spots
- Best option for vehicle safety in busy urban environments, helping you to protect vulnerable road users
- Auto-switches to the relevant camera when turning and reversing
- Easy remote configuration completed by experienced programmers with pre-sets for optimal birds-eye view
- Cables and accessories provided



CALL 02088638333 CALL 02088638333 **PRODUCT CATALOGUE** sales@c-ko.co.uk sales@c-ko.co.uk **PRODUCT CATALOGUE**

LIVE VIEW SOFTWARE

INTRODUCTION

Live View is a 4G based service offered by CKO, enabling customers to view individual vehicles and whole fleets with real-time and historical footage. We offer a variety of contract types; speak to our team to find out more.

This package includes:

- **>>** PC software
- iOS and Android phone software
- Device SIM
- Data server
- Customised email alerts and notifications
- Telephone and remote access support
- Across global networks



COMPLETE VISIBILITY FOR FLEET MANAGERS

The Live View system offers secure, multi-network, real-time video-streaming and GPS tracking for your single or multiple vehicle fleet. With our system, any user can view up to 16 separate streams at any one time. With two users, you can double the number of streams to 32.

Using the registration number as the default code and the depot to allocate the group, it is simple to classify a fleet of vehicles and enable seperate user permissions to access different sets of information.

Not only does the Live View system support efficiency and control over your fleet, but it also aids in increasing vehicle safety - both for your drivers and the general public.










FUNCTIONALITY

Our system offers market-leading functionality:

- >>> Vehicle tracking by GPS current location and speed of the vehicle can be seen
- Alerts regarding faults such as geo-fencing breaches, failing hardware, switch to SD cardrecording, and video loss on channel (e.g. faulty camera).
- Remote download footage can be viewed through mobile phone or PC
- >> Historical footage downloadable footage for the last month
- >>> Change settings remotely settings such as camera resolution, date, time, and recording settings can be changed remotely. Software updates can also be sent remotely.
- Multiple vehicle viewing the interface can show 32 live and recorded streams at one time, meaning that many fleets can be managed on a single interface.
- SOS button the introduction of our SOS button on the DVR means if an incident occurs, the driver can push the button, and the central office will be immediately notified. This will allow your team to quickly and easily investigate the issue. As well as time and date, a video clip of between 1 to 2 minutes can be saved on the server from when the alarm is pushed on the device.
- Geofencing multiple fences can be applied and notifications will alert the user when a vehicle enters or leaves those zones. Not only does this provide an anti-theft security feature, businesses can also use geofencing to monitor employees in the field, automate time cards and keep track of individual vehicles over particular time periods.

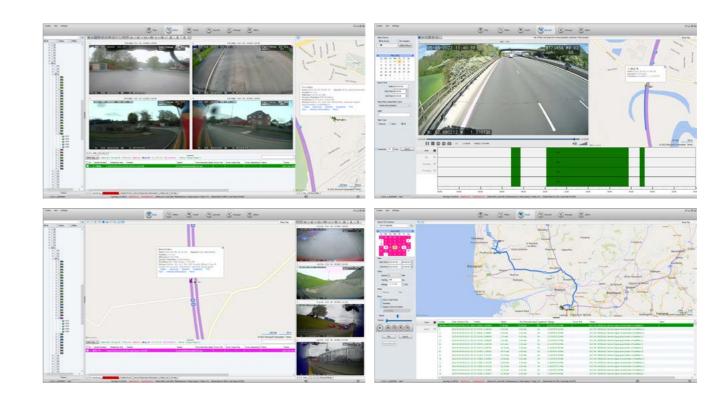

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk call 02088638333 PRODUCT CATALOGUE

LIVE VIEW SOFTWARE

NOTIFICATIONS

Without Live View, if your vehicle was involved in an incident, you would only hear about what had happened once your driver returns to your site and reports the incident. With our Live View system, you will receive notifications tailored to your own specification. In case of an incident, an alarm will be displayed on the Live View page or direct to your mobile phone. It does not interrupt the user view; but like an exception report, it can alerting users that action is required.

HISTORIC TRACKING

The real-time vehicle locator can be expanded to show single or multiple vehicle locations. If a vehicle is offline, the last location where it was connected will be displayed.

The 'Track' tab provides the historic location, speed, and DVR status. Usefully, it can map the historic route, showing where the vehicle has travelled in 30 second intervals. It is possible to search this function by time and date. The information is stored on our dedicated secure server, meaning that vehicles that are not online can also be checked. In terms of vehicle safety and security, this is an added bonus of the Live View system. When added to the 'Status' of the DVR, the Live View system can help to highlight issues of suspected device tampering or fuel theft.

REMOTE DOWNLOAD & HISTORIC VIEWING

Our standard tariff comes with a fair-use cap; however, additional data can be purchased in bundles. Historic recordings can be remotely downloaded or streamed online by pinpointing the desired time and date. This allows the user to act quickly in response to incident reports. The file is saved in several ways - on the local device and on our server. Single or multiple channels can be downloaded and saved in a secure format, which is only playable on our local PC software (where it can be converted to AVI if required).

Photos can also be viewed using the 'Record' tab. The photos are snapshots that can be linked to the alarms and other custom settings from the server side. The photos are saved to our dedicated secure server.

Alarm inputs can be linked to different events (e.g. the rear door opening for a delivery). This type of setting does require additional wiring and configuration, but greatly enhances the functions available and can be tailored for the specific needs of the business.

EMAIL NOTIFICATION

13

We recommend that email alerts are sent to a dedicated person in your company. In the event of equipment failure, this provides you with a fail-safe beyond the driver's daily walk-around check. Under FORS Standard v7.1, daily checks of electronic safety is now compulsory. In the event of DVR video loss or hard drive failure, an email alert can be sent directly to designated contacts within your organisation.

After understanding your needs, and with your permission, email alerts can be set up to multiple email addresses per vehicle or per group of vehicles. Custom input alarms can also be set to report by email at certain times, or when an SOS button is pressed. As part of the initial set up, we can talk through your business needs and customise the settings to ensure that you get the most out of our Live View system.

PHONE APP

The phone app provides the most basic information compared to the feature-packed desktop version. However, for quick and easy reference, the phone app allows users to check if vehicles are online, view the cameras in real time, and see their current or last location.

CHANGING DVR SETTINGS

Our Live View desktop application allows DVR configuration settings to be changed. Settings - like alarm triggers, camera types and many others - can be altered without having to be on site with the vehicle. Current settings can also be displayed. Making changes to settings after installation may be advantageous to tweak the systems usability, or when new features become available. The DVR must be connected to Live View to access this function. User access control levels can be set so that settings can only be altered by those with the necessary permissions, securing alterations and ensuring consistency across the fleet.



PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk

DATALIVE SOFTWARE

INTRODUCTION

Revolutionise your fleet management with the cutting-edge Datalive software; a suite of modular applications that can be customised to meet your needs. This is your key to unlocking unparalleled efficiency, protection, and driver safety. Furthermore, this solution can assist you in achieving FORS, DVS, and Earned Recognition compliance.

TELEMATICS

Datalive's web-based telematics solution provides managers with 24/7 intelligence, valuable insights, and complete operational control. Track the live location of your entire fleet, review historical overviews of vehicle journeys, analyse driver behaviour, and much more.



Track It

Live location and key status of your entire fleet and assets.



Trace It

Historical overview of a vehicle's journey showing duration, distance and stops. Review the route taken on an easy-to-use map.



Analyse It

Analyse your driver's behaviour using a customisable scoring system.



Locate It

Locate assets in real time. Live location reports along with historical reports for duration of time at locations.

CONNECTED AI CAMERAS

Protect vulnerable road users while ensuring that vehicles are being driven safely and correctly. Stream live audio and video footage, review triggered events, and report any incidents directly into your FNOL team. Industry-leading AI technology can remove false positive events, removing time-consuming manual validation of incidents.



Review It

Review triggered driving and speeding events with our Connected Al Camera platform. Download video footage, searchable by date and time. Investigate claims efficiently based on a priority of Red, Amber and Green rating without costly vehicle downtime.



Filter It

Cutting-edge AI technology removes false positive events. Fast and highly accurate cloud AI provides powerful analysis and reduces manual validation. Leaving only critical and important events for viewing.



15

Stream It

View live audio and video footage through your vehicle's bespoke camera system. Proactively monitor and assist drivers remotely and provide real-time customer updates.

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk

DIGITAL FLEET COMPLIANCE

Ensure high standards of professionalism and reliability across your fleet. This set of modules will help you to perform audits and checks; ensuring that high standards of vehicle condition are optimised and maintained.



Check It

Digitalised daily vehicle damage and maintenance checks completed by drivers, supervisors, and auditors. Indicate via the app, any damage or maintenance issues on an interactive vehicle diagram.



Achieve It

This module measures all DVSA Earned Recognition KPIs for defects, inspections, and MOTs helping your fleet achieve ER status. Providing interactive communication between auditors, managers and operators to fall in line with ISO guidelines. This is a required module for DVSA's Earned Recognition Scheme.



Defect It

Manage your fleet defects, from initial report to repair. Provides cohesive collaboration between drivers, planners, managers, and 3rd party garages. This is a required module for DVSA's Earned Recognition Scheme.



Onboard It

Easily onboard your drivers. Record, validate, and monitor expiring documentation, ensuring compliance. The app also offers a fully customisable driver training process.



Inspect It

Schedule and complete vehicle safety inspections, vehicle equipment safety inspections, MOTs, and services ensuring compliance across your fleet. Plan effectively to reduce downtime of vehicles. This is a required module for DVSA's Earned Recognition Scheme.



File It

DVSA accredited digital vehicle file for all documents. Easy to use dashboard removes manual intervention and ensures compliance. This is a required module for DVSA's Earned Recognition Scheme.





DASH CAMERAS

DC-DVR-CVL-02

FHD 360° Rotating Dash Camera with GPS, G-Sensor, and Wi-Fi



- 1080P Full HD recording
- 170° Wide view angle, 130° Horizontal, 80° Vertical
- Built in G-force sensor, GPS & WiFi
- Software download for video with map information
- Park mode triggered by vibration
- Stores up to 128GB (TF memory card not included)
- AV/HDMI out
- Built-in speaker & microphone
- Suitable for 12/24V vehicles
- 2nd Optional D1 (CVBS PAL or NTSC) camera input via jack plug







sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

DASH CAMERAS

DC-DVR-4G-01

2K Connected 4G Dash Camera



- 2K (1440p) forward facing recording
- 146° Wide view angle, 121° Horizontal, 64° Vertical
- Built in G-force sensor & GPS
- Connected solution & CKO Live
- Stores up to 512GB (TF memory card not included)
- Built-in speaker & microphone
- Suitable for 12/24V vehicles
- · Cigarette & hard wire
- 2nd channel input

19





DC-DVR-4G-INTCAM Driver Facing Internal Camera

DASH CAMERAS

DC-DVR-4G-ADV

Advanced Al Expandable Connected Dash Camera



- 1920p Forward Facing recording with 140 degree view
- 1080p Cabin View Camera with 170 degree view
- Real time advanced driver assistance notifications through audio feedback, expandable with optional display for visual feedback
- Dual 256GB storage for a total of 512GB storage
- 4G Connects to Datalive platform
- 6-Axis gravity sensor supporting rapid acceleration., deceleration, harsh cornering and accident detection
- Suitable for 12/24V vehicles
- 4 Sensor inputs
- Additional camera input available with optional cable, 1 x AHD and 1 x IPC



BUILD A COMPLETE PACKAGE

- Our connected dash camera forms the core of a full safety package, with seamless accessory integration.
- Add the DSM camera to detect fatigue, distraction, and risky driving behaviour in real time.
- Pair ADAS with the Rwatch display to warn drivers of lane departures, collisions, and other safety risks.

PRODUCT CATALOGUE CALL 02088638333 CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk PRODUCT CATALOGUE

DASH CAMERAS / Accessories




Pair with DC-DVR-4G-ADV

CKO-RWATCH-01



CKO-DSM-CAM-01

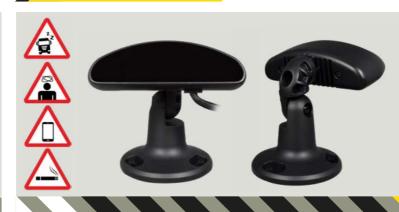

Rwatch Live Driver Feedback Display

- Gives audio and visual feedback to drivers when combined with DMS and LDWS cameras on the DVR
- Display Size: 36mm
- Device Size: 42 x 45 x 16mm
- Resolution: 128 x 128 pixels
- Brightness: 400cd/m2
- TFT-LCD gloss display
- Operating Temperature: -30°C to +70°C
- E-Marked: UNECE R10 compliant
- CE Marked and FCC/ICC approved

>> DMS IP Camera

- Full HD driver facing camera
- Built-in IR technology for low light conditions
- Enables driver monitoring features on DVR including driver fatigue, yawning, driver distraction, mobile phone use, and smoking
- Effective through glasses/sunglasses
- Current: 0.18 Amps @ 12V
- Operating Temperature: -40°C to +70°C
- E-Marked: UNECE R10 compliant
- CE Marked and FCC approved

DC-DVR-4G-ADV-EXT



Camera Expansion Cable

- 1 x 6pin Aviation for IP connectivity
- 1x 4pin Aviation for AHD cameras
- 1 x 4pin Aviation for Monitor TOT-MON/DVR cable required in addition to allow for correct connection

CATEGORY 3Digital Video Recording



BENEFITS

Safety

Monitor driving ability and standards to improve driver manoeuvring, visibility, and concentration. Can also be used to facilitate safe loading and unloading practices.

Protection

Offers security and damage prevention from crash-for-cash, inflated/fraudulent claims, and unjustified personal injury claims.

- Record up to 8 channels of video and audio, plus 2 IPC
- Built in GPS for vehicle location, speed, and time which is also watermarked including vehicle registration on the video footage
- Built in 3-Axis G sensor to detect vehicle impact, harsh braking, and rapid acceleration
- Customisable alarm inputs to record events and automatically view selected cameras on screen, for example to display side camera when indicating
- Alarm output to trigger other devices
- Intelligent voltage protection to turn the DVR off at specified parameters
- Options for time sync, with GPS and automatic daylight-saving time switch
- Multiple power modes delay switches on with the vehicle's ignition and off after a customisable point, timing turns on and off at set times. Other options available to keep the DVR on and switch the cameras off
- Customisable recording options for recording selected channels when the ignition is on/off
- Records in AHD 1080p/720p or D1 camera format, with individually selectable channels.
- SD card back up function
- Snapshot image alarm function. Export config files by USB for fleet continuity.
- Cameras can be mirrored, flipped, and orientated on the DVR

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk call 02088638333 PRODUCT CATALOGUE

DVR / Advanced Al Devices

CKO-DVR-6CH-KIT

Advanced Al 6-Channel Mobile Digital Video Recorder with 1TB SSD



- Expandable features with built in Al functions through additional hardware
- 1080P
- Video input: 4 x 4 pin aviation, 2 X 6 pin aviation
- Video output: 4 pin aviation AHD 720P or CVBS selectable via menu
- Audio input: 4 x 4 pin aviation
- Support storage up to 2TB M.2 SATA SSD and 2 x 512GB TF Cards Supplied with 1TB SSD
- 4G connectivity
- 8 IO input
- Dimensions: 154 x 151 x 52mm
- Suitable for 12 and 24 volt vehicles
- Supplied with GPS and 4G antenna
- Includes trigger and power cable


DVR / Accessories Pair with CKO-DVR-6CH-KIT



CKO-RWATCH-01



CKO-DSM-CAM-01

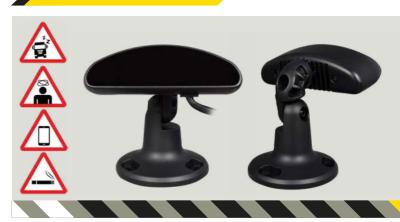

>> Rwatch Live Driver Feedback Display

- Gives audio and visual feedback to drivers when combined with DMS and LDWS cameras on the DVR
- Display Size: 36mm
- Device Size: 42 x 45 x 16mm
- Resolution: 128 x 128 pixels
- Brightness: 400cd/m2
- TFT-LCD gloss display
- Operating Temperature: -30°C to +70°C
- E-Marked: UNECE R10 compliant
- · CE Marked and FCC/ICC approved

DMS IP Camera

- Full HD driver facing camera
- Built-in IR technology for low light conditions
- Enables driver monitoring features on DVR including driver fatigue, yawning, driver distraction, mobile phone use, and smoking
- Effective through glasses/sunglasses
- Current: 0.18 Amps @ 12V
- Operating Temperature: -40°C to +70°C
- E-Marked: UNECE R10 compliant
- CE Marked and FCC approved

CKO-ADAS-CAM-01



CKO-EASYCHECK



>> ADAS IP Forward Facing Camera

- Enables ADAS features on DVR including Forward Collision Warning, Headway Monitoring Warning, Lane Departure Warning
- 1080p Camera
- 6pin Aviation Connection
- Viewing Angle: 53°(H) x 3°(V) x 61°(D)
- Operating Temperature: -40°C to +70°C
- E-Marked: UNECE R10 compliant
- CE Marked and FCC approved

>> EasyCheck

- USB device for DVR setup and control via Veyes app
- Allows for easy configuration changes via a phone or tablet
- Useful tool when a monitor is not connected to a phone

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

DVR / Comparison Chart



DVR COMPARISON CHART

We take pride in our ability to meet the requirements of our clients when it comes to Digital Video Recorders (DVRs). Whether you're seeking robust storage capacity, enhanced video quality, or additional channels, our extensive range of DVRs offer the ideal solution that will exceed your expectations.

	Front of product	Front of product	Front of product
	Back of product	Back of product	Back of product
	DVR-4SD	DVR-4HD	DVR-8HD
>>> Recording			
Max Resolution	1080P (1920 X 1080)	1080P (1920 x 1080)	1080P (1920 x 1080)
Channels	4	4 (plus 1 IPC)	8 (plus 2 IPC)
Audio	√	\checkmark	√
Video Compression	H.265+ Encrypted AVI	H.265+ Encrypted AVI	H.265+ Encrypted AVI
AHD Compatible	\checkmark	\checkmark	√
IPC Compatible	X	1 Channel	2 Channel
>> AV in / out			
Video input	4 x 4 pin aviation	4 x 4 pin aviation, 1 x 6 pin aviation	8 x 4 pin aviation, 2 x 6 pin aviation
Video output	4 pin aviation, VGA	4 pin aviation, VGA	4 pin aviation, VGA
Audio input	4 x 4 pin aviation	4 x 4 pin aviation	8 x 4 pin aviation
Audio output	4 pin aviation	4 pin aviation	4 pin aviation
OSD	1/2/4	1/2/3/4/5	1/2/3/4/6/8/9/12
>> Network streaming			
Wi-Fi	Optional	Optional	Optional
4G Compatible	Optional	Optional	Optional
Mobile App	Android / iOS	Android / iOS	Android / iOS
>>> Storage / Backup			
HDD / SSD	X	2.5" SATA II (2TB max)	2.5" SATA II (2TB max)
SD Card	2x SDxC (256GB max)	1x SDxC (256GB max)	1x SDxC (256GB max)
Backup	USB 2.0 / network	USB 2.0 / network	USB 2.0 / network
>>> Peripheral			
Lockable	√	\checkmark	√
GPS	√	\checkmark	√
G-Sensor	√	\checkmark	√
Timer off Delay	Up to 24 hours	Up to 24 hours	Up to 24 hours
HDD / SD Failure Warning	√	\checkmark	√
Motion Detection	X	X	X
Camera Full Screen Trigger	√	\checkmark	√
Split Screen Camera Trigger	X	X	X
USB Mouse Control	√	\checkmark	√
Remote Control	Optional	Optional	Optional
USB Port	USB 2.0	USB 2.0	USB 2.0
) Other			
Power output	12v	12v	12v
Power input	8 - 36v (DC)	8 - 36v (DC)	8 - 36v (DC)

DVR / Devices



DVR4SD-10-256

4 Channel SD DVR - 1080P, AHD, D1 256GB



- 1080P (1920 x 1080)
- Video input: 4 x 4 pin aviation
- Video output: 4 pin aviation, VGA
- Audio input: 4 x 4 pin aviation
- · Audio output: 4 pin aviation
- OSD: 1 / 2 / 4
- 256 GB SD Card
- Also available with 4G live connectivity

DVR4HD-4G-10-1TB

4 Channel HDD DVR - 1080P, AHD, D1, IP - 4G - Kit



- 1080P (1920 x 1080)
- Video input: 4 x 4 pin aviation
- Video output: 4 pin aviation, VGA
- Audio input: 4 x 4 pin aviation
- Audio output: 4 pin aviation
- OSD: 1 / 2 / 3 / 4 / 5
- 1TB SSD
- Also available without 4G live connectivity

DVR8HD-4G-11-1TB

8 Channel HDD DVR - 1080P, AHD, D1, IP - 4G - Kit







- 1080P (1920 x 1080)
- Video input: 8 x 4 pin aviation
- · Video output: 4 pin aviation, VGA
- Audio input: 8 x 4 pin aviation
- · Audio output: 4 pin aviation
- OSD: 1 / 2 / 3 / 4 / 6 / 8 / 9 / 12
- 1TB SSD
- Also available without 4G live connectivity



With the 4G version of the our DVRs, you can make full use of our LiveView software. Please note that a subscription fee is required for access.

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE



DVR / Packages



3 Camera Package For Tractor Units

For tractor units, we highly recommend our 3-camera kit, featuring two side cameras and one front camera. This setup provides optimal coverage for monitoring blind spots. Paired with our DVR, these cameras deliver high-quality video footage directly onto the 7" monitor.





27

Our DVRs seamlessly integrate with our monitors and cameras to form a comprehensive monitoring system, enhancing safety during maneuvering and reversing. By providing real-time visuals, these solutions aid in collision prevention and ensure smoother operations.

4 Camera Package For Box Vans

Our box van package is equipped with two side cameras, a front camera, and a rear camera featuring infrared capability, ensuring complete coverage around the vehicle. Whether navigating tight spaces or reversing in low-light conditions, our advanced camera system provides clear and reliable footage.



PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE



DVR / Accessories






29

5 Camera Package For Rigid HGVs

Our cutting-edge 5-camera system for rigid HGVs, ensures unparalleled safety and monitoring capabilities. With two side cameras, a front camera, a rear camera, and an additional IP camera dedicated to monitoring the driver cabin, this package offers comprehensive coverage of both inside and outside the vehicle.

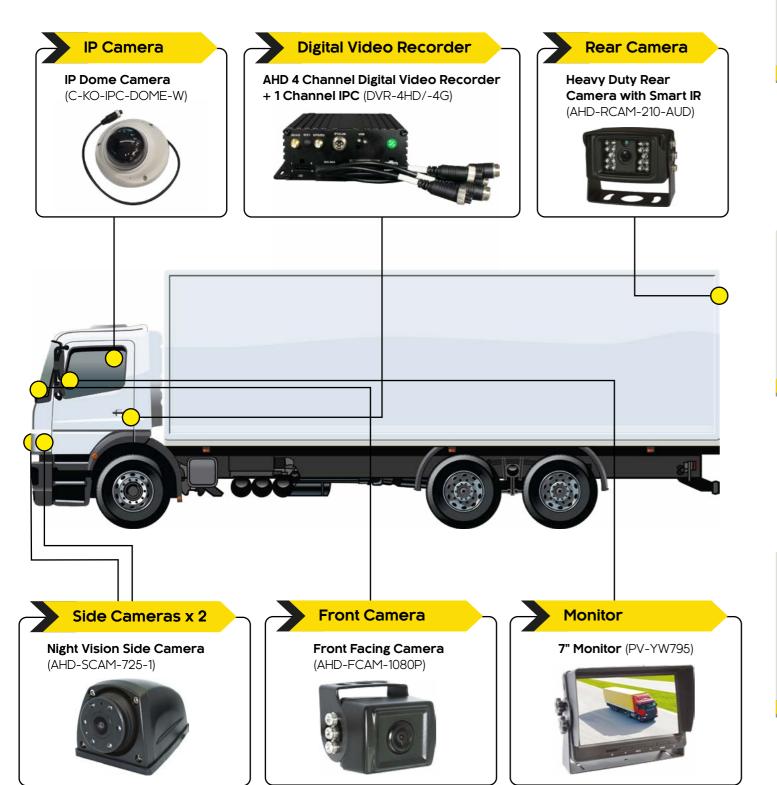





GPS Antenna for DVR

- Magnetic
- SMA connector
- 2.5 metre cable

DVR-SATA-USB



>>> DVR to SATA HDD USB Cable

- Connection from SSD to PC
- USB to SATA
- USB 3.0

DVR-TRAY



Spare/Replacement Media Tray

 Media caddy/tray for 2.5" drives for the DVR-4-HD & DVR-8-HD range

DVR-3G/4G-ANT



External 3G/4G Antenna

SMA connector

DVR-MOUSE



DVR Mouse

- USB Mouse for DVR configuration
- Optical Sensor
- Compact Design

DVR-MIC



DVR Microphone Kit

- Audio microphone for DVR
- 4Pin aviation connection
- Audio / Video Splitter lead included

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk call 02088638333 PRODUCT CATALOGUE

DVR / Accessories



DVR / Legacy Accessories



DVR-SSD

 \sim



CT-TRAY



CT-KEY



2.5" Solid State Drive (500MB, 1TB, 2TB)


- · Available in various memory capacities.
- Recommended for DVRs
- DVR (on factory settings) will use 1.2GB per hour, per channel at 720p
- 5-year manufacturer warranty
- 7mm SATA III-6Gb/s

>> Spare DVR Caddy

- Supplied without media installed
- DVR must format new media for recording to begin
- USB 2.0 Type B connection on rear

>> Key to Unlock DVR Tray

SD-CARD



CT-REMOTE




>>> SD Card (32GB, 64GB, 128GB)

- Available in various memory capacities.
- DVR (on factory settings) will use 650MB per channel, per hour
- Can be used with our DVRs to record footage
- · Function must be enabled on DVR to switch to SD card recording in the unlikely event of hard drive failure

>> Spare Remote Control for DVR

- Spare Remote Control for DVR
- Supplied with battery
- Additional batteries also available

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

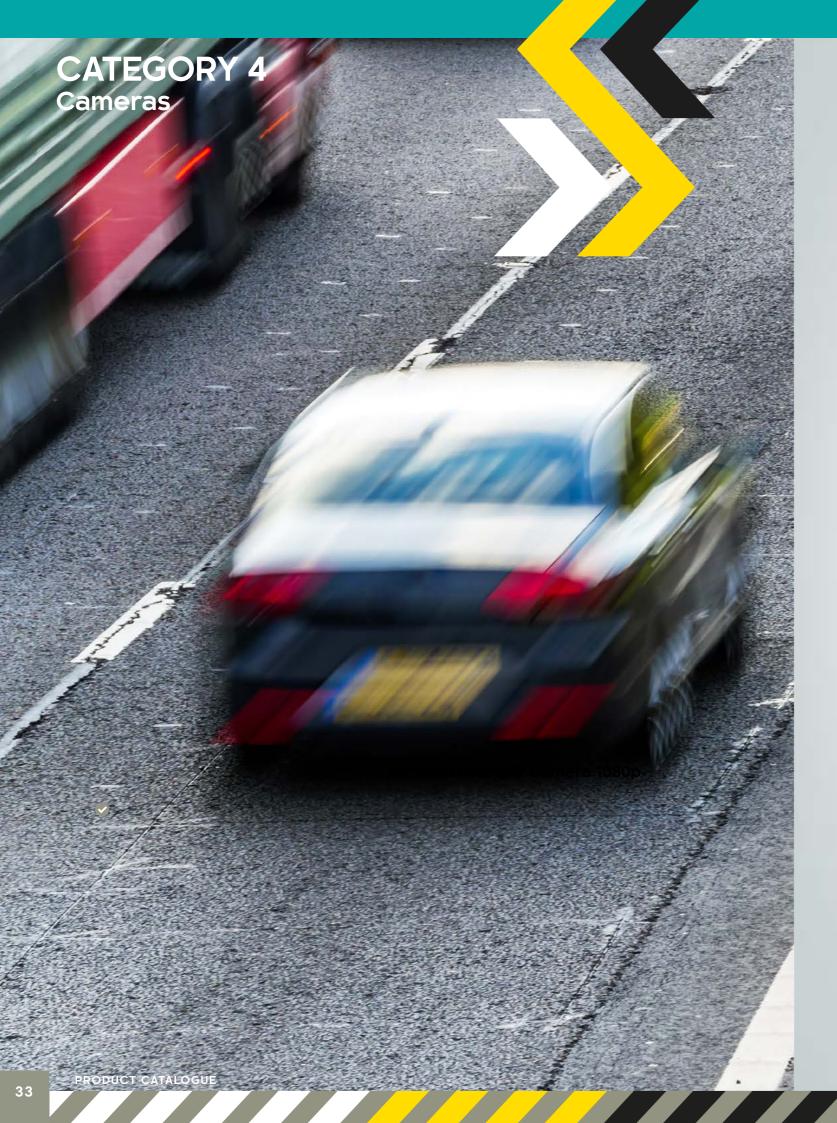

CAMERAS / IPC



Forward Facing IP Camera 1080p





- 6 Pin aviation connection
- Resolution: 2.0 Mega Pixel
- Output Resolution: 1080P
- Effective Pixels: 1920H x 1080V
- Video Format: 50Hz, 25fps
- Power Consumption: DC 12V ± 5%, 240mA, 3.0W
- Product Weight Net: 145 g, All: 265 g
- Operating Condition Temp: -45°C to +75°C, Humidity 95%
- Lens: f=3.6mm
- Viewing Angle: 75°
- Light Sensitivity Colour: 0.05Lux @ F1.2;
 B/W:0.01 Lux @ F1.2
- Dimensions (L x W x H): 49 x 75 x 122 mm

sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

CKO-AI-AD38-150

Al Pedestrian Detection Camera



- Vulnerable Road User detection / human form recognition
- Adjustable zones to show detected areas
- Full high-definition video output, can be overlaid with colour zones and pedestrian warning information
- 720P/1080P Selectable
- No control box needed, can be directly connected to normal monitors / DVR
- Audio alarm output, external buzzer supported
- Calibration via Wi-Fi hotspot with USB dongle
- Waterproof / dustproof rated to IP69K
- Dimensions: 140 x 63 x 54 mm



CKO-Al-AD38-Spacer Spacer for CKO-Al-AD38-150 Camera



CKO-EXT-AI-5M-01 5M 8pin Extension Cable



CKO-CAM-SIDE-B Stainless Steel Bracket -Camera Side Mount



CKO-AI-AD37-150/170 1080p Intelligent Pedestrian Detection & BSD Camera 150/170 Degree Lens



CKO-EXT-AI-10M 10M 8pin Extension Cable



CKO-CAL-AITOOL USB Wi-Fi Calibration Tool for Al Camera

CAMERAS / AHD

AHD-CT200-F

AHD Front Windscreen Mount Camera





- Window Mounted Front Facing Camera
- 4 Pin aviation connection
- Mini BMW connector to 4 Pin aviation for easier application
- TV system: AHD
- Output resolution: 720p
- FPS: 25

- Viewing angle: 110°(H) 60°(V)
- Image device: 1/3" CMOS OV60
- Focal length: f: 2.3mm
- Operating voltage: 12V DC
- Dimensions: 60mm(W) 35mm(D) 30mm(H)

AHD-FCAM-1080P

Front Facing Camera



- 4 Pin aviation connection
- Mini BMW connector to 4 Pin aviation for easier application •
- TV system: AHD
- Output resolution: 1080p
- FPS: 25

- Viewing angle: 130°(H) 70°(V)
- Image device: 1/4" CMOS
- Focal length: f: 2.3mm
- Operating voltage: 12V DC
- Dimensions: 39mm(W) 35mm(D) 30mm(H)

AHD-FCAM-140-CL

| Image device: 1/3" CMOS OV60 option

AHD-F307-1080P-01

AHD 1080P Camera



36





- 4 Pin aviation connection
- TV system: AHD
- Output resolution: 1080p
- FPS: 25

- Viewing angle: 110°
- Image Device: 1/3" CMOS
- Operating voltage: 12V DC
- Dimensions: 58mm(W) 55mm(D) 50mm(H)

CALL 02088638333 CALL 02088638333 PRODUCT CATALOGUE **PRODUCT CATALOGUE** sales@c-ko.co.uk sales@c-ko.co.uk





AHD-SCAM-725-1080P

1080P Night Vision Side Camera



AHD-SCAM-725-1

Night Vision Side Camera 4 Pin Only







- Output resolution: 1080p
- FPS: 25
- Viewing angle: 140°(H) 80°(V)
- Image device: 1/4" CMOS
- Focal length: f: 2.8mm
- Operating voltage: 12V DC
- Dimensions: 60mm(W) 75mm(D) 50mm(H)
- Mirror image selectable
- Guide lines selectable
- Built in Microphone



- 4 Pin aviation connection
- TV system: AHD
- Output resolution: 720p
- FPS: 25
- Viewing angle: 130°(H) 70°(V)
- Image device: 1/3" CMOS
- Focal length: f: 2.8mma
- Operating voltage: 12V DC
- Dimensions: 60mm(W) 75mm(D) 50mm(H)
- Mirror image selectable
- · Built in Microphone



AHD-SCAM-720-AUD-2-WHITE

Night Vision Side Camera in White













37



- Wide Dynamic Range (WDR)
- Night vision
- 4 Pin aviation connection
- Built in Microphone for Audio
- IP rating: IP69K
- TV system: AHD
- Output resolution: 1080p
- Effective pixels: 1920(H) x 1080(V)
- Image device: 1/2.9" CMOS
- Operating voltage: 12V DC
- Dimensions: 57mm(W) 75mm(D) 43mm(H)



- 4 Pin aviation connection attached to mini BM Plug
- TV system: AHD
- Output resolution: 720p
- FPS: 25
- Viewing angle: 100°(H) 70°(V)
- Image device: 1/3" CMOS
- Focal length: f: 2.8mm
- Operating voltage: 12V DC
- Dimensions: 50mm(W) 68mm(D) 43mm(H)
- Mirror image selectable
- Guide lines selectable
- · Built in Microphone



Side Camera Spacer







Allows cameras to be mounted further out. Product may need to be adapted. For use with all cameras 25mm deep.

PRODUCT CATALOGUE CALL 02088638333 CALL 02088638333 PRODUCT CATALOGUE sales@c-ko.co.uk sales@c-ko.co.uk



CAMERAS / AHD



CKO-DC-AHD21-AD15

AHD 720P Mini Plastic Dome Camera




C-KO-IPC-DOME-W

White IP Dome Camera



Operating Voltage: 12V



- Power Consumption: Max 70mA
- IP Rating: IP66
- Connection type: 4 Pin Aviation
- TV system: PAL

- Output resolution: Adjustable green cable.
- Joined is CVBS and cut is HD 1080P
- Viewing angle: 110
- Lens: f2.1mm
- Operating voltage: 12/24v
- True Image
- Includes angle bracket



Output resolution: 1080p

- Viewing angle: 105°
- Image device: 1/2.9" CMOS 1080P
- Operating voltage: 12V DC
- Dimensions: 120mm(W) 65mm(H)
- Waterproof Rating: IP65
- Built in Microphone
- Operating Temperature: -45~75°C

AHD-DOME-600TVL

AHD Dome Camera with Audio



>>

- Dome Camera
- Night Vision
- 4 pin aviation connection
- Built in Microphone for Audio
- TV system: AHD
- · Output resolution: 720p
- FPS: 25

- Viewing angle: 74°(H) 58°(V) 88°(D)
- Image device: 1/3" CMOS
- Operating voltage: 12V DC
- Dimensions: 86mmØ
 58mm(H)

AHD-DCAM-650

AHD Dome Audio 720P







- AHD Dome Camera with Audio
- Night vision
- 4 Pin aviation connection
- Plastic dome cover
- Anti-tamper design
- Built in Microphone for Audio
- TV system: AHD

- Output Resolution: 720p
- FPS: 25
- Viewing angle: 90°(H) 40°(V)
- Image device: 1/3" CMOS
- Focal length: f: 2.8mm
- Operating voltage: 12V DC
- Dimensions: 77mmØ
 60mm(H)

AHD-DOME-SM

39

4 Pin aviation connection.

- TV system: AHD
- Output resolution: 1080p
- FPS: 25
- Viewing angle: 100°(H) 70°(V)

AHD Small Dome Camera

- Image device: 1/3" CMOS
- Focal length: f: 2.8mm

- Operating voltage: 12V DC
- Dimensions: 50mm(W) 68mm(D) 43mm(H)
- Mirror image selectable
- · Guide lines selectable
- Built in Microphone

AHD-BR-RVC07

AHD Wing Mirror Side View Camera







- Night vision
- 4 Pin aviation connection
- Can be mounted to the wing mirror
- TV system: AHD
- Output resolution: 720p
- FPS: 25

- Viewing angle: 89°(H) 50°(V)
- Image device: 1/3" CMOS
- Focal length: f: 1.2mm
- Operating voltage: 12V DC
- Dimensions: 80mm(W) 49mm(D) 63mm(H)

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

CKO-DC-AHD21-AD15

AHD 720P Mini Plastic Dome Camera



- Operating Voltage: 12V
- Operating Temperature: -30 +70 degrees
- Power Consumption: Max 70mA
- IP Rating: IP66
- Connection type: 4 Pin Aviation
- TV system: PAL
- · Output resolution: Adjustable green cable. Joined is CVBS and cut is HD 1080P
- Viewing angle: 110
- Lens: f2.1mm
- Operating voltage: 12/24v
- True Image
- Includes angle bracket



CKO-DC-AHD25IR-AD15 AHD 720P Mini Plastic Dome Camera 2.5mm Megapixel Lens, with IR

41



CKO-DC-AHD-AD15 AHD 720P Mini Plastic Dome Camera 2.5mm Megapixel Lens

CAMERAS / AHD



AHD-CA-9898

AHD Dual Camera in White







- Dimensions (including mount): 104mm(W) x 66mm(D) x 97mm(H)
- Operating Voltage: 12V DC
- Power Consumption (on): 300mA max
- Power Input: Via 4-Pin Aviation Connector
- Connection Type: 2x 4-Pin Aviation
- TV System: PAL
- Operating Temperature: -30°C to +70°C
- Operating Humidity: <95% RH
- IP Rating: IP67

AHD-RCAM-1080P

1080p Heavy Duty Rear Camera



- 4 Pin aviation connection
- TV system: AHD
- Output resolution: 1080p
- FPS: 25
- Viewing angle: 89°(H) 72°(V) 103°(D)
- Image device: 1/3" CMOS
- Focal length: f: 2.8mm
- Operating voltage: 12V DC
- Dimensions: 80mm(W) 63mm(D) 70mm(H)
- Mirror image

AHD-RCAM-210-AUD

Heavy Duty Rear Camera with Smart IR







- 4 Pin aviation connection TV system: AHD
- Output resolution: 720p
- FPS: 25
- Viewing angle: 89°(H) 72°(V)
- 103°(D)

- Image device: 1/3" CMOS
- Focal length: f: 2.8mm
- Operating voltage: 12V DC
- Dimensions: 80mm(W) 63mm(D) 70mm(H)
- Mirror image
- Built-in Microphone

AHD-RCAM-210-AUD-CONDUIT

Heavy Duty Camera with Smart IR and Cable in Conduit

CALL 02088638333 PRODUCT CATALOGUE CALL 02088638333 PRODUCT CATALOGUE sales@c-ko.co.uk sales@c-ko.co.uk

CAMERAS / FORS Packages



At CKO, our mission is to ensure your fleet's compliance with the Fleet Operator Recognition Scheme (FORS) by providing top-notch vehicle safety equipment. The FORS scheme stands as a beacon of higher standards, encompassing safety, efficiency, environmental protection, and overall operational excellence.

By adhering to FORS standards, your fleet not only adopts safer working practices but also contributes significantly to reducing work-related road risks. Moreover, FORS certification instils confidence in your customers, assuring them that your fleet operates with safety and sustainability at its core. These advantages not only enhance your reputation but also provide a competitive edge over non-certified fleets.

In line with FORS's commitment to integrating cutting-edge technology, we are proud to introduce our FORS kit, featuring Al pedestrian detection cameras. With the ability to accurately differentiate between roadside fixtures and vulnerable road users, such as pedestrians and cyclists, our Al cameras represent the future of fleet safety.



Find out more about our FORS kits. Call us today on 0208 863 8333 (Option 1).



THE VEHICLE SAFETY EXPERTS

Brake Light Cameras with Built-In Versatility.



The Smart Solution for Installers Who Demand Flexibility.

Compatible with various van makes and models, With an IP68 rating and ECE R10 approved. Each with even more products coming soon! Designed for exceptional performance, our brake light cameras feature switchable PAL/NTSC, selectable D1 or AHD available for rear-view cameras to integrate with OEM 1080p resolution.

camera includes a 10m Aviation Extension Cable for easy installation. A wide range of video inserters are Infotainment screens.

Contact the CKO sales team to find out more.

Call 0208 863 8333 (Option 1)



CAMERAS / Brake Light

C-KO-MAXUS9-CAM-CW

Maxus eDeliver 9 (2020-Current)



- Connection Type: RCA
- TV System: Adjustable black cable. Default NTSC cut the loop for PAL
- Output Resolution: Adjustable white cable. Default CVBS cut the loop for 1080P
- Viewing Angle: 170°
- Mirrored Image: Yes
- Guide Lines: Adjustable via green cable. Default ON, cut the loop for OFF
- Microphone: No
- Operating Voltage: 12V/24V
- Operating Temperature: -30°C ~ +70°C
- Power Consumption: Max 70mA
- IP Rating: IP67

45



Black Wire: NTSC/PAL (Default NTSC)
White Wire: AHD/CVBS (Default AHD)
Green Wire: Guide lines ON/OFF (Default ON)

CAMERAS / Brake Light

CKO-BER-CAM-CW

Citroen Berlingo (2008-Current)



- Dimensions: 240mm (W) x 28mm (D) x 110mm (H)
- Resolution: D1/AHD 1080p (Selectable)
- Image Format: PAL 25FPS/NTSC 30FPS (Selectable)
- Connection Type: 4 Pin Aviation
- Camera Adjustment: Up/Down
- Night Vision IR LED: No
- Night Vision: 0.1 Lux

- Incorporated LED brake light
- Approval: ECE R10
- Viewing Angle: 140°
- IP Rating: IP68
- Operating Voltage: 12v/24v
- Operating Temperature: -20° to 70°
- White Balance: Automatic
- Audio: No



Green Wire: PAL/NTSC (Default PAL) White Wire: AHD/CVBS (Default AHD)

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

CAMERAS / Brake Light



CAMERAS / Brake Light




C-KO-CRAFTER-CAM-CW

Green Wire: PAL/NTSC (Default PAL)

Orange Wire: AHD/NTSC (Default AHD)

Fit for VW Crafter / MAN TGE (2017-Current)





- Resolution: D1/AHD 1080p (Selectable)
- Image Format: PAL 25FPS/ NTSC 30FPS (Selectable)
- Connection Type: 4 Pin Aviation
- Camera Adjustment: Up/
- Night Vision IR LED: 8

- Night Vision: 0.1 Lux
- Replaces current brake light lens
- Approval: ECE R10
- Viewing Angle: 130°
- IP Rating: IP68
- Operating Voltage: 12v/24v
- Operating Temperature: -20° to
- White Balance: Automatic
- · Audio: No

C-KO-BDV-CAM-CW





Green Wire: PAL/NTSC (Default PAL) White Wire: AHD/CVBS (Default AHD)

Mercedes-Benz Vito Van Two Doors (2016)



- Dimensions: 60mm (W) x 65mm (D) x 220mm (H)
- Resolution: D1/AHD 1080p (Selectable)
- Image Format: PAL 25FPS/ NTSC 30FPS (Selectable)
- Connection Type: 4 Pin Aviation
- Camera Adjustment: Up/ Down
- Night Vision IR LED: 8

- Night Vision: 0.1 Lux
- Replaces current brake light lens
- Approval: ECE R10
- Viewing Angle: 130°
- IP Rating: IP68
- Operating Voltage: 12v/24v
- Operating Temperature: -20° to
- White Balance: Automatic
- Audio: No

C-KO-FT-CAM-CW

Ford Transit Brake Light camera (2013-2019)



- Dimensions: 405mm (W) x 55mm (D) x 110mm (H)
- Resolution: D1/AHD 1080p
- Image Format: PAL 25FPS/ NTSC 30FPS (Selectable)
- Connection Type: 4 Pin Aviation
- Lens: 2.8mm
- Camera Adjustment: Fixed
- Night Vision IR LED: 8

- Night Vision: 0.1 Lux
 - Incorporated LED brake light
 - Approval: ECE R10
 - Viewing Angle: 140°
 - IP Rating: IP68
 - Operating Voltage: 12v/24v
 - Operating Temperature: -20° to
 - White Balance: Automatic
 - · Audio: No

CKO-EXP-CAM-CW



Green Wire: PAL/NTSC (Default PAL) White Wire: AHD/CVBS (Default AHD)

Peugeot Expert/Traveller, Citroen Jumpy Space Tourer & Toyota ProAce (2016-Current)



- Dimensions: 265mm (W) x 35mm (D) x 65mm (H)
- Resolution: D1/AHD 1080p (Selectable)
- Image Format: PAL 25FPS/ NTSC 30FPS (Selectable)
- Connection Type: 4 Pin Aviation
- Camera Adjustment: Up/ Down
- Night Vision IR LED: No

- Night Vision: 0.1 Lux
- Replaces current brake light lens
- Approval: ECE R10
- Viewing Angle: 140°
- IP Rating: IP68
- Operating Voltage: 12v/24v
- Operating Temperature: -20° to
- White Balance: Automatic
- Audio: No

C-KO-TC-CAM-LED-CW

Green Wire: PAL/NTSC (Default PAL)

Orange Wire: AHD/CVBS (Default AHD)

Green Wire: PAL/NTSC (Default PAL)

Orange Wire: AHD/NTSC (Default AHD)

Ford Transit Custom with LED (2016-Current)





- Resolution: D1/AHD 1080p (Selectable)
- Image Format: PAL 25FPS/ NTSC 30FPS (Selectable)
- Connection Type: Aviation
- Lens: 2.8mm
- Camera Adjustment: Fixed
- Night Vision IR LED: 10

- Night Vision: 0.1 Lux
- Incorporated LED brake light
- Approval: ECE R10
- Viewing Angle: 130°

IP Rating: IP68

- Operating Voltage: 12v/24v
- Operating Temperature: -20° to
- White Balance: Automatic
- · Audio: No

C-KO-NRV-CAM-CW






Green Wire: PAL/NTSC (Default PAL) White Wire: AHD/CVBS (Default AHD)

Renault Master, Nissan NV400, Vauxhall Movano Brake Light Camera (2010-Current)





- Resolution: D1/AHD 1080p (Selectable)
- Image Format: PAL 25FPS/ NTSC 30FPS (Selectable)
- Connection Type: 4 Pin Aviation
- Camera Adjustment: No
- Night Camera IR LED: No

- Night Vision: 0.1 Lux
- Replaces current brake light lens
- Approval: ECE R10
- Viewing Angle: 130° IP Rating: IP68
- Operating Voltage: 12v/24v
- Operating Temperature: -20° to

PRODUCT CATALOGUE

48

- White Balance: Automatic
- Audio: No

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333

CAMERAS / Brake Light



CAMERAS / Brake Light



C-KO-IVEC-CAM-CW

Iveco Daily (2023-Current)



- Dimensions: 345mm (W) x 25mm (D) x 85mm (H)
- Resolution: D1/AHD 1080p
- Image Format: PAL 25FPS/ NTSC 30FPS (Selectable)
- Connection Type: 4 Pin
- Lens: 2.8mm
- Camera Adjustment: Ball Up/ Down

- Night Vision IR LED: 8
- Night Vision: 0.1 Lux
- Incorporated LED brake light
- Approval: ECE R10
- Viewing Angle: 140°
- IP Rating: IP68
- Operating Voltage: 12v/24v
- Operating Temperature: -20° to 70°
- White Balance: Automatic
- Audio: No

C-KO-VR-CAM-CW





Green Wire: PAL/NTSC (Default PAL) Orange Wire: AHD/NTSC (Default AHD)

Vauxhall Vivaro / Renault Traffic (2014-



- Dimensions: 230mm (W) x 80mm (D) x 70mm (H)
- Resolution: D1/AHD 1080p (Selectable)
- Image Format: PAL 25FPS/ NTSC 30FPS (Selectable)
- Connection Type: 4 Pin Aviation
- Camera Adjustment: Ball Up/
- Night Vision IR LED: 8

- Night Vision: 0.1 Lux
- Replaces current brake light
- Approval: ECE R10
- Viewing Angle: 130°
- IP Rating: IP68
- Operating Voltage: 12v/24v
- Operating Temperature: -20° to 70°
- White Balance: Automatic
- Audio: No

C-KO-VITO-CAM-CW



Green Wire: PAL/NTSC (Default PAL)

White Wire: AHD/CVBS (Default AHD)



Green Wire: PAL/NTSC (Default PAL) White Wire: AHD/CVBS (Default AHD)

Mercedes Benz V-Klasse / Vito / Viano (2014-Current)

- Dimensions: 490mm (W) x 40mm (D) x 95mm (H)
- Resolution: D1/AHD 1080p (Selectable)
- Image Format: PAL 25FPS/ NTSC 30FPS (Selectable)
- Connection Type: Aviation
- Lens: 1.7mm
- Camera Adjustment: Up/ Down
- Night Vision IR LED: No

Incorporated LED brake light

Night Vision: 0.1 Lux

- Approval: ECE R10
- Viewing Angle: 140°
- IP Rating: IP68
- Operating Voltage: 12v/24v
- Operating Temperature: -20° to
- White Balance: Automatic
- Audio: No

C-KO-CAD-CAM-CW





Green Wire: PAL/NTSC (Default PAL) White Wire: AHD/CVBS (Default AHD)

VW Caddy (2022-2024)

Dimensions: 185mm (W) x

Image Format: PAL 25FPS/

NTSC 30FPS (Selectable)

Connection Type: 4 Pin

Camera Adjustment: Up/

35mm (D) x 95mm (H)

(Selectable)

Aviation

Down

Lens: 1.7mm

- Night Vision IR LED: No Night Vision: 0.1 Lux
- Resolution: D1/AHD 1080p Incorporated LED brake light
 - Approval: ECE R10
 - Viewing Angle: 130°
 - IP Rating: IP68
 - Operating Voltage: 12v/24v
 - Operating Temperature: -20° to 70°
 - White Balance: Automatic
 - Audio: No

C-KO-SPR-CAM-CW





- Green Wire: PAL/NTSC (Default PAL) Orange Wire: AHD/CVBS (Default AHD)

49

Mercedes Sprinter (2006-2023) / VW Crafter (2007-2023)

- Dimensions: 345mm (W) x Night Vision: 0.1 Lux 35mm (D) x 120mm (H) Replaces current brake light
- Resolution: D1/AHD 1080p (Selectable)
- Image Format: PAL 25FPS/ NTSC 30FPS (Selectable)
- Connection Type: 4 Pin Aviation
- Lens: 2.8mm
- Camera Adjustment: Fixed
- Night Vision IR LED: 10

- Approval: ECE R10
- Viewing Angle: 130°
- IP Rating: IP68
- Operating Voltage: 12v/24v
- Operating Temperature: -20° to
- White Balance: Automatic
- Audio: No

C-KO-FPC-CAM-CW





Green Wire: PAL/NTSC (Default PAL) Orange Wire: AHD/NTSC (Default AHD)

Fiat Ducato, Peugeot Boxer, Citroen Jumper Van (2006-2023)



- Dimensions: 270mm (W) x 55mm (D) x 100mm (H)
- Resolution: D1/AHD 1080p (Selectable)
- Image Format: PAL 25FPS/ NTSC 30FPS (Selectable)
- Connection Type: 4 Pin Aviation
- Lens: 2.8mm
- Camera Adjustment: Ball Up/ Down

- Night Vision IR LED: 8
- Night Vision: 0.1 Lux
- Incorporated LED brake light Approval: ECE R10
- Viewing Angle: 140°
- IP Rating: IP68
- Operating Voltage: 12v/24v
- Operating Temperature: -20° to 70°
- White Balance: Automatic
- Audio: No

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE



CAMERAS / Packages



CAMERAS / Number Plate



Camera Package For Vans

Elevate your driving experience with the AHD-7MM-CAM-CAB van camera package. At the heart of the solution is our cutting-edge 7" AHD Mirror Monitor, boasting a high-resolution, integrated digital display. This monitor offers a crystal-clear view of the rear of your vehicle, ensuring full control and awareness of your surroundings.

With its two-channel triggering capability, the display is activated precisely when needed. The system supports two video inputs, accommodating CVBS (D1) as well as AHD720p and AHD1080p formats.



Mirror Monitor

7" AHD Mirror Monitor. Dual purpose with both clip-on and







CW634

Number Plate Camera with Night Vision



- Dimensions: 198mm(W) 28mm(H) 28mm(D)
 - Operating Voltage: 12V
 - Mirrored Image: Yes
 - Night Vision IR: Yes 4 IR
 - Min Illumination: 0 Lux (with
 - Guide Lines: No
 - Audio: Yes
 - Viewing Angle: 110°(H) 80°(V)
 - Connection Type: 4-pin aviation

- · White Balance: Auto
- IP Rating: IP68
- Image Sensor: 1/3" CMOS PC1058
- TV System: PAL CVBS (D1)
- Effective Pixels: 960 x 576
- Emark Certification: R10
- Refresh Rate: 25fps
- Operating Temperature: -20°C to +70°C
- Operating Humidity: <95%
- Storage Temperature: -40°C to

C-KO-FHD670-170

1080p Number Plate Camera







- Dimensions: 198mm(W) x 28mm(H) x 28mm(D)
- Operating Voltage: 12V
- Mirrored Image: Yes
- Night Vision IR: Yes 4 IR **LEDs**
- Min Illumination: 0 Lux (with
- Guide Lines: No
- Audio: Yes
- Viewing Angle: 170°
- Connection Type: 4-pin aviation
- White Balance: Auto

- - Image Sensor: 1/2.9" CMOS
 - TV System: AHD 1080p
 - Effective Pixels: 1920 x 1080
 - Emark Certification: R10
 - Refresh Rate: 25fps

• IP Rating: IP68

- Operating Temperature: -20°C to +70°C
- Operating Humidity: <95%
- Storage Temperature: -40°C to
- Storage Humidity: <95%

CW141642MCAI

4 Pin aviation connection



- Mirror image
- Guide lines selectable
- TV system: PAL or CVBS (D1)

Number Plate Camera with Surround

- FPS: 25
- Effective pixels: 648 x 488
- Viewing angle: 120°(H)
- Image device: 1/3" CMOS
- Focal length: f: 2.1mm
- Operating voltage: 12V DC
- Dimensions: 527mm(W) 37mm(D) 125mm(H)

CALL 02088638333 **PRODUCT CATALOGUE** CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk PRODUCT CATALOGUE

51







- 140 Degree Viewing Angle
- · Guideline selectable on by default, green cable
- Mirror / true image selectable Mirror by default, white cable
- Horizontal / Vertical mounting selectable -Horizontal by default, orange cable
- 27mm wide x 31mm height x 24mm deep excluding screw thread

- · 26mm needed to allow for screw thread and cable to be mounted onto vehicle
- 17mm screw thread depth
- 5mm hole size
- 59cm fly lead
- 4pin mini BM connector
- AHD version also available

NTSC Version (COL-M95-N)

PAL Version (COL-M95-P)

AHD Version (COL-M95-AHD-P)

CAMERAS / D1



CA-309-PAL

Wide Angle Camera



- RCA connection
- TV system: PAL
- Output resolution: 576i
- Guidelines: Yes Selectable
- Mirror image: Yes Selectable
- FPS: 25
- Viewing angle: 170°
- Image Device: 1/3" CMOS OV60
- Operating voltage: 12V DC
- Dimensions: 28mm(W) 40mm(D) 23mm(H)

CA-9320-800

800TVL Front Camera







- 4 Pin aviation connection
- Mirror image selectable via cutting green wire
- Mini BMW connector to 4 Pin aviation
- TV system: PAL
- Output resolution: 576i
- FPS: 25

- Effective pixels: 976 x 582
- Viewing angle: 110°(H) 80°(V)
- Image device: 1/3" SONY CCD
- Focal length: f: 2.3mm
- Operating voltage: 12V DC
- Dimensions:
- 39mm(W) 35mm(D) 30mm(H)

CA-9401-Y-01



Wedge Camera

- RCA video connection Guide lines selectable
- via joining green wires
- Fixed mirror image
- TV system: NTSC
- Output resolution: 480i
- FPS: 30

- Viewing angle: 120°(H) 110°(V)
- Image device: 1/3" CMOS OV60
- Focal length: f: 2.1mm
- Operating voltage: 12V DC
- Dimensions: 30mm(W) 34mm(D) 37mm(H)

CALL 02088638333 PRODUCT CATALOGUE sales@c-ko.co.uk

PRODUCT CATALOGUE 53

CALL 02088638333

sales@c-ko.co.uk





C-KO-CAM-410

Side View Camera with Audio



C-KO-BR-RVC07

Wing Mirror Side View Camera





- Side View Camera with Audio
- Night vision
- 4 Pin aviation connection
- Built in Microphone for Audio
- Mirror image selectable via jumper plug
- TV system: PAL
- Output resolution: 576i
- FPS: 25
- Effective pixels: 728 x 488
- Viewing angle: 105°(H) 72°(V)
- Image device: 1/3" CMOS PC1089
- Operating voltage: 12V DC
- Dimensions: 57mm(W) 75mm(D) 43mm(H)



- Night vision
- 4 Pin aviation connection
- Can be mounted to the wing mirror
- TV system: PAL
- Output resolution: 576i
- FPS: 25
- Effective pixels: 500 x 582
- Viewing angle: 89°(H) 70°(V)
- Image device: 1/3" CMOS
- Focal length: f: 2.8mm
- Operating voltage: 12V DC
- Dimensions: 80mm(W) 49mm(D) 63mm(H)



C-KO-CAM-410-WHITE

Side View Camera with **Audio in White**

CAM-DOME-600TVL

Dome Camera with Audio



56

DCAM-ANGLE-25



Surface Mount Adaptors for **Dome Cameras**

25" Surface Mount Adaptor

SCAM-SPACER



Side Camera Spacer

Allows cameras to be mounted further out. Product may need to be adapted. For use with all cameras 25mm deep.



- Night vision
- 4 Pin aviation connection
- Built in Microphone for Audio
- Anti-tamper design
- TV system: PAL
- Output resolution: 576i
- FPS: 25
- Effective pixels: 704 X 576
- Viewing angle: 60°(H) 30°(V)
- Image device: 1/3" CMOS
- Operating voltage: 12V DC
- Dimensions: 86mmØ 58mm(H)

PRODUCT CATALOGUE CALL 02088638333 CALL 02088638333 PRODUCT CATALOGUE sales@c-ko.co.uk sales@c-ko.co.uk





CA-MB-SPR-CCD-N/-P

Overhanging Camera



CA-9770-PAL

Dual Camera





- 4 Pin aviation connection Roof Mounted Camera
- Fixed mirror image
- TV system: NTSC / PAL
- Output resolution: 480i / 576i
- FPS: 30 (NTSC) / 25 (PAL)
- Effective pixels: 720 x 480
- Viewing angle: 85°(H) 60°(V)

- Image device: 1/3" Sony CCD
- Focal length: f: 2.1mm
- Operating voltage: 12V DC
- Dimensions: 132mm(W) 220mm(D) 100mm(H)



- RCA connection
- Mirror image
- Built-in microphone
- TV system: PAL
- Output resolution: 576i
- FPS: 25
- Effective pixels: 960 x 576
- Viewing angle: 75°(H)

- Image device: 1/3" CMOS PC1058K
- Operating voltage: 12V DC
- Dimensions: 110mm(W) 70mm(D) 80mm(H)

CA-9406-PAL

Night Vision Bumper Camera







- Mini BMW connector to 4 Pin aviation
- Mirror image selectable
- TV system: PAL
- Output resolution: 576i
- FPS: 25
- Effective pixels: 976 x 582
 - Viewing angle: 120°(H) 100°(V)
 - Image device: 1/3" CMOS
 - Focal length: f: 2.3mm
 - Operating voltage: 12V DC
 - Dimensions: 31mm(W) 40mm(D) 31mm(H)

RCAM-0-087-CAM







- Heavy Duty Body Mount Camera
- Night vision Smart IR
- 4 Pin aviation connection
- Built in Microphone for Audio

Heavy Duty Body Mount Camera

- Mirror image selectable via screw on camera rear
- TV system: PAL
- Output resolution: 576i

- FPS: 25
- Effective pixels: 960 x 576
- Viewing angle: 80°(H) 60°(V)
- Image device:
- 1/3" CMOS PC1058K
- Operating voltage: 12V DC
- Dimensions: 90mm(W) 62mm(D) 68mm(H)

RCAM-0-087-CAM-W


Heavy Duty Body Mount Camera in White

COL185-SCR-MK2

57

Multi Mount Micro Camera





- Adaptor to side mount camera
- 4 Pin aviation connection
- Mirror image selectable by cutting white wire
- Guide lines selectable by cutting green wire
- TV system: PAL

- Output resolution: 576i
- FPS: 25
- Effective pixels: 720 x 540
- Viewing angle: 110°(H) 90°(V)
- Image device: 1/3" CMOS
- Focal length: f: 2.1mm
- Operating voltage: 12V DC
- · Dimensions: 37mm(W) 30mm(D) 27mm(H)

C-KO-RCAM-210-NTSC

Heavy Duty Rear Camera







- 4 Pin aviation connection
- TV system: NTSC
- Effective pixels: 960 x 576
- FPS: 30
- Viewing angle: 89°(H) 72°(V) 103°(D)
- Image device: 1/3" CMOS
- Focal length: f: 2.8mm
- Operating voltage: 12V DC
- Dimensions: 80mm(W) 63mm(D) 70mm(H)
- Mirror image
- Built in Microphone

CALL 02088638333 **PRODUCT CATALOGUE** sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE



MONITORS


CKO-MON-QUAD7" Quad View Monitor



- 7" HD quality digital screen
- Built-in speaker (audio on all channels)
- 4 x 4 Pin aviation inputs
- 4 Triggers
- Resolution: 1024 x 600
- Contrast ratio: 500:1
- Aspect ratio: 16:9
- Brightness: 400cd/m²
- Viewing angle: U: 50° D:70° R/L 70°/70°

- Operating voltage: 12V / 24V DC
- Dimensions: 179mm(W) 25mm(D) 120mm(H)
- Monitor can power cameras
- Shows up to 4 images on the screen at the same time
- Each input displayed on screen when triggered
- Button locking feature
- Auto dimming function in low light conditions

60

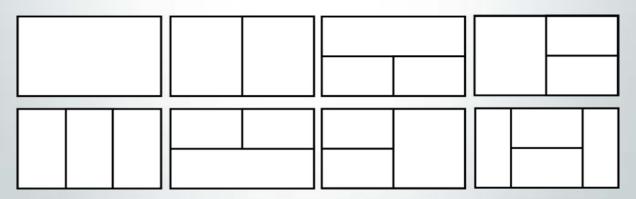

Screen Layout Options

sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

MONITORS



MONITORS



AHD-MON-C13

7" AHD Dash Mount Monitor



PV-YW795

7" Dash Mount Monitor



• 7" Digital panel

- AHD / PAL / NTSC compatible
- 3 x 4 Pin aviation inputs
- Resolution: 1024 x 600
- Contrast ratio: 500:1
- Aspect ratio: 16:9
- Brightness: 400cd/m²
- Viewing angle: U: 50° D:70° R/L 70°/70°
- Operating voltage: 12V / 24V DC
- Dimensions: 180mm(W) 23mm(D) 120mm(H)
- Monitor can power cameras

- 7" Digital panel
- PAL / NTSC compatible
- 2 x 4 Pin aviation inputs
- 2 Triggers
- Resolution: 800 x 480
- Contrast ratio: 500:1
- Aspect ratio: 16:9
- Brightness: 400cd/m²
- Viewing angle: U: 50° D:70° R/L 70°/70°
- Operating voltage: 12V / 24V DC
- Dimensions: 180mm(W) 23mm(D) 120mm(H)
- Monitor can power cameras
- Audio on CH2

AHD-MON-C90

9" AHD Dash Mount Monitor










- AHD / PAL / NTSC compatible
- 2 x 4 Pin aviation inputs
- 1Trigger
- Resolution: 1024 x 600
- Contrast ratio: 500:1
- Aspect ratio: 16:9
- Brightness: 400cd/m²
- Viewing angle: U: 50° D:70° R/L 70°/70°
- Operating voltage: 12V DC
- Dimensions: 192mm(W) 32mm(D) 134mm(H)
- Monitor can power cameras







62



- Night Vision with Smart IR
- 4 Pin aviation connection
- Built in Microphone for Audio
- Mirror image selectable via screw on camera rear
- Camera Dimensions:
- 80mm(W) 63mm(D) 70mm(H)
- 7" Digital TFT LCD
- Delay timer for trigger set on screen
- Powers cameras 12V DC
- Can mirror cameras on screen
- Built in sun shade
- Built in speaker
- 2 x 4 Pin aviation inputs
- 1 Trigger
- Operating voltage: 12V / 24V DC
- Monitor Dimensions: 172mm(W) 45mm(D) 115mm(H)





61







PRODUCT CATALOGUE CALL 02088638333 CALL 02088638333 PRODUCT CATALOGUE sales@c-ko.co.uk sales@c-ko.co.uk

MONITORS / Kits

MONITORS / Kits

CK-18 CK-18 Kit Camera



- 4 Pin aviation connection
- TV system: PAL
- · Output resolution: 576i
- Mirror image: Yes
- Night vision IR: Yes 18 LEDs
- FPS: 25
- Viewing angle: 80°(H) 60°(V)
- Image Device: 1/3" Sharp CMOS
- Operating voltage: 12V DC
- Dimensions: 80mm(W) 63mm(D) 70mm(H)

AHD-7MM-CAM-CAB 7" AHD Mirror Monitor Kit



- 7" Mirror Monitor with dual purpose clip-on and stalk functionality, rear camera, and 10 metre extension cable
- 7" TFT LCD Panel
- Resolution: 1024 * RGB* 600 (AHD Monitor)
- Aspect Ratio: 16:9
- 2 Video Inputs via 4pin Aviation connection
- Trigger camera for channel 2
- Configurable delay on triggered image via menu

- PAL & NTSC auto-switching
- CVBS (D1), AHD720p, AHD1080p compatible
- Power DC 12-24 Volts
- Dimensions: 250mm x 21mm x 109mm
- The solution supports two Video inputs, allowing for the connection of CVBS (D1) and is AHD720p and AHD1080p compatible
- Comes with a remote control
- Optional mirror monitor stalk bracket available separately

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE


MONITORS / Mirror Monitors

AHD-7MM-01 7" AHD Mirror Monitor



Dual purpose with both clip-on and stalk

- 7" TFT LCD Panel
- Resolution: 1024 * RGB* 600 (AHD Monitor)
- Aspect Ratio: 16:9
- 2 Video Inputs via 4pin Aviation connection
- Trigger camera for channel 2
- · Configurable delay on triggered image via menu
- PAL & NTSC auto-switching
- CVBS (D1), AHD720p, AHD1080p compatible
- Power DC 12-24 Volts
- Dimensions: 250mm x 21mm x 109mm





Optional mirror monitor stalk bracket

MONITORS / Mirror Monitors

TD-03 4.3" Mirror Monitor with Stalk



- Universal mount
- Built in Ambient Light Sensor
- 4.3" Digital panel
- PAL / NTSC compatible
- 2 x RCA video inputs
- 1 Trigger
- Resolution: 480 x 272

- Contrast ratio: 300:1
- Aspect ratio: 16:9
- Brightness: 250cd/m²
- Viewing angle: U: 50° D:70° R/L 70°/70°
- Operating voltage: 12V DC
- Dimensions: 270mm(W) 44mm(D) 80mm(H)

66



PRODUCT CATALOGUE CALL 02088638333 CALL 02088638333 PRODUCT CATALOGUE sales@c-ko.co.uk sales@c-ko.co.uk

MONITORS / Mirror Monitors



MONITORS / Mirror Monitors



C-KO-MIR-5C-01

5" Mirror Monitor Clip On



5" Digital panel

- PAL / NTSC compatible
- 2 x 4 pin aviation video
- Switches with video signal
- Resolution: 480 x 272
- Contrast ratio: 300:1
- Aspect ratio: 16:9

Brightness: 500cd/m²

- Viewing angle: U: 50° D:70°
- Operating voltage: 12V DC
- Dimensions: 276mm(W) 25mm(D) 97mm(H)



TC-05-01

Universal Stalk Included

4.3" Mirror Monitor with Universal Stalk









Rear of Product

1 Trigger Resolution: 480 x 272

- Contrast ratio: 300:1
- Aspect ratio: 16:9

• 4.3" Digital panel

inputs

PAL / NTSC compatible

2 x 4 pin aviation video

- Brightness: 250cd/m²
- Viewing angle: U: 50° D:70° R/L
- Operating voltage: 12V DC
- Dimensions: 276mm(W) 30mm(D) 39mm(H)

C-KO-MIR-5S-01

5" Mirror Monitor with Universal Stalk





Rear of Product



Universal Stalk Included

TC-06-01

Rear of Product

- 5" Digital panel PAL / NTSC compatible
- 2 x 4 pin aviation video inputs
- Switches with video signal •
- Resolution: 480 x 272
- Contrast ratio: 300:1
- Aspect ratio: 16:9

- Brightness: 500cd/m²
 - Viewing angle: U: 50° D:70° R/L
 - Operating voltage: 12V DC
 - Dimensions: 276mm(W) 25mm(D) 97mm(H)

Mirror Monitor Stalks

CKO offer a wide range of stalk options designed to suit various vehicle makes and models, making it easy to securely fit your mirror monitor into your vehicle. Our stalk selection is fully compatible with our mirror monitors and is continually updated to support newer vehicles, ensuring you can find the right fit with ease.

STALK#CM



Ceiling Mounted Stalk

Ceiling mounted stalk for monitors and mirror

STALK#1



Universal Mirror Stalk/ NISSAN/ FORD

For use with TC-05, C-KO-MIR-5S-01, AHD-7MM-01/ CAM-CAB

4.3" Mirror Monitor Clip On





Rear of Product

- 4.3" Digital panel
- PAL / NTSC compatible
- 2 x 4 pin aviation video inputs
- 1 Trigger
- Resolution: 480 x 272
- Contrast ratio: 300:1
- Aspect ratio: 16:9

- Viewing angle: U: 50° D:70° R/L 70°/70°

Brightness: 250cd/m²

- Operating voltage: 12V DC
 - Dimensions: 276mm(W) monitors 30mm(D) 39mm(H)

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

MONITORS / Mirror Monitors



MONITORS / Packages



STALK#3







For use with TC-05, C-KO-MIR-5S-01, AHD-7MM-01/CAM-CAB

STALK#12





Stalk For Citroen/ Peugeot/ Mercedes/ Fiat

For use with TC-05, C-KO-MIR-5S-01, AHD-7MM-01/CAM-CAB

STALK#39



>> Stalk For Peugeot

For use with TC-05, C-KO-MIR-5S-01, AHD-7MM-01/CAM-CAB

STALK#7





Mirror Stalk For New Kia/ Vauxhall Antara

For use with TC-05, C-KO-MIR-5S-01, AHD-7MM-01/CAM-CAB

STALK#35



Stalk For NEW Peugeot Boxer / Fiat Ducato

For use with TC-05, C-KO-MIR-5S-01, AHD-7MM-01/CAM-CAB

STALK#42




Stalk For Vauxhall up to 2014

For use with TC-05, C-KO-MIR-5S-01, AHD-7MM-01/CAM-CAB

Camera Package For Motorhomes

Ensure the safe reversing and maneuvering of your motorhome with our specialised camera kit. Our solution includes the new 7" Mirror Monitor, equipped with dual clip-on and stalk functionality, providing optimal visibility and control. Paired with our white dual camera featuring a built-in microphone, you'll have comprehensive coverage of your surroundings, enhancing safety and peace of mind during every journey.

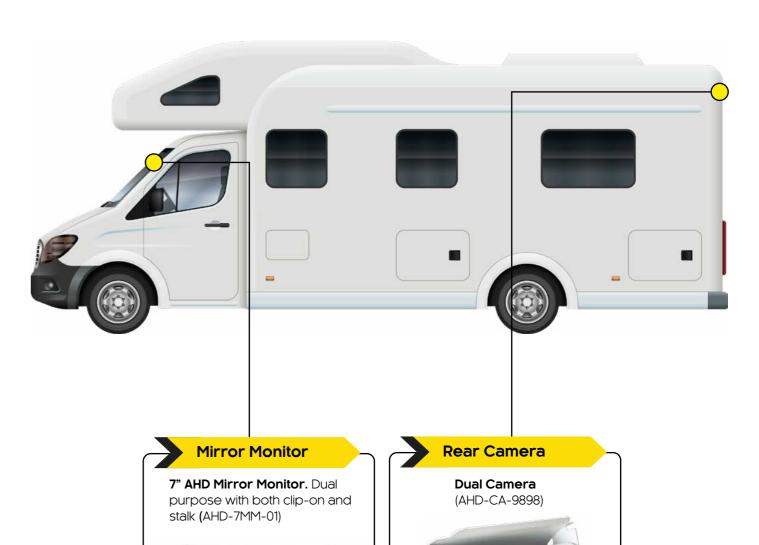

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE



THE VEHICLE SAFETY EXPERTS

Cabling Solutions for Your Camera Systems.



From Off-The-Shelf Options to Fully Bespoke Builds.

We've got you covered with our extensive cable range. Turn to pages 80 - 91 to explore high-quality cables designed for durability across a wide range of vehicle types and applications. We also offer a bespoke cabling service (including custom looms and connectors) that caters to the unique needs of each vehicle throughout its life cycle.

We provide detailed technical drawings and can assist in sourcing specialist components, guaranteeing compatibility and performance. With a strong focus on quality, our services are backed by **comprehensive internal testing and certifications**, while our rigorous assessment process ensures that every factory meets the highest standards.

Contact the CKO sales team to find out more.

Call 0208 863 8333 (Option 1)





SENSORS / Parking Sensor



SENSORS / Parking Sensor



RS-4-22-RM-F

4 Head Rubberised Parking Sensors for Metal Bumpers



RS-2-22-RM-A

2 Head Rubberdised Parking Sensors for Metal Bumpers



 \bigcirc



- Push fit rubber heads
- Number of heads: 4
- Sensor hole size: 22Ømm
- · Length of cable 3m at the furthest sensor
- Detection range: 1.5m to 0.3m
- Sensitivity adjustment
- Operating voltage: 12V DC
- Flat heads



- Push fit rubber heads
- Number of heads: 2
- Sensor hole size: 22@mm
- Length of cable 3m at the furthest sensor
- Detection range: 1.5m to 0.3m
- Sensitivity adjustment
- Operating voltage: 12V DC
- 20° Angled heads

RS-4000

Parking Sensor



RS-4000-F-GPS-MATT

GPS Speed Controlled Front Parking Sensor, GPS Speed Triggered







- Quick Installation simple live & earth
- 5 second off delay for traffic
- Push fit matt 22mm black heads
- Sensors on between 1mph 6mph
- Length of cable 3m at the furthest sensor
- Detection range: 1.2m to 0.3m
- Operating voltage: 12V DC
- Variable volume
- Buzzer included
- · Optional display available



• Quick Installation - simple live & earth

- 5 second off delay for traffic
- Push fit matt 22mm black heads
- Sensors on between 1mph 6mph
- Length of cable 3m at the furthest sensor
- Detection range: 1.2m to 0.3m
- Operating voltage: 12V DC
- Variable volume
- · Buzzer included
- · Optional display available

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE



WARNING ALARMS



ALM-MULTI-01

Multiple Vocal Message Warning Alarm





- IP Rating: IP68
- Rated Voltage: 12/24V DC
- Certifications: ECE R10 UKCA
- Sound pressure: 97dB +/-4dB
- Dimensions: 104 x 68 x 60mm
- Three warning message options: "Caution, This Vehicle Is Turning Left", "Caution, This Vehicle Is Turning Right", and "Warning, This Vehicle Is Reversing".

ALM-WNB-01

Selectable White Noise / Beep Alarm





- IP Rating: IP67
- Rated Voltage: 12/80V DC
- Certifications: ECE R10 UKCA
- Sound pressure: 87dB, 97dB, 107dB +/-4dB
- Dimensions: 102 x 67 x 68mm
- Two sound options: "Beep Beep" alert or white noise

ALM-WNBDE-01

Selectable White Noise / Beep Double **Engage Alarm**







- IP Rating: IP67
- Rated Voltage: 12/80V
- Certifications: ECE R10 UKCA
- Sound pressure: 87dB, 97dB, 107dB +/-4dB
- Dimensions: 102 x 36 x 67mm
- Housing Material: ABS
- Two sound options: "Beep Beep" alert or white noise
- Additional Features Night Silent Function
- Double Engage Function (Disables audible alarm if reverse is engaged twice within 2 seconds)

sales@c-ko.co.uk

CALL 02088638333

PRODUCT CATALOGUE

WARNING ALARMS



CKO-BUZ-1

Single Tone Buzzer





- · Flat top acoustic buzzer
- Voltage 10-28v Dc
- Frequency 450Hz
- · Current 25 mA
- Termination by male & female spade terminals

AVAL2-14CLHO

ALARM-A-LIGHT






- Talking audio alert 'STAND CLEAR, THIS VEHICLE IS TURNING LEFT'
- Orange LED talking Alarm-a-light.
- The ultimate alarm and light warning system.
- When the alarm is activated the lights flash in unison with the sound, when mute or half volume are selected the lights flash brighter to highlight the danger.

- Dual voltage
- CE and EMC approved
- M.I.R.A. Tested for all on and off highway applications Epoxy sealed for greater durability against water
 Complete with anti-vibration gasket and mounting screws
- E marked e11*72/245*2009/19*7568*00
- 10R approved 10R-037568
- Rear and right turn alarm alternatives available

sales@c-ko.co.uk

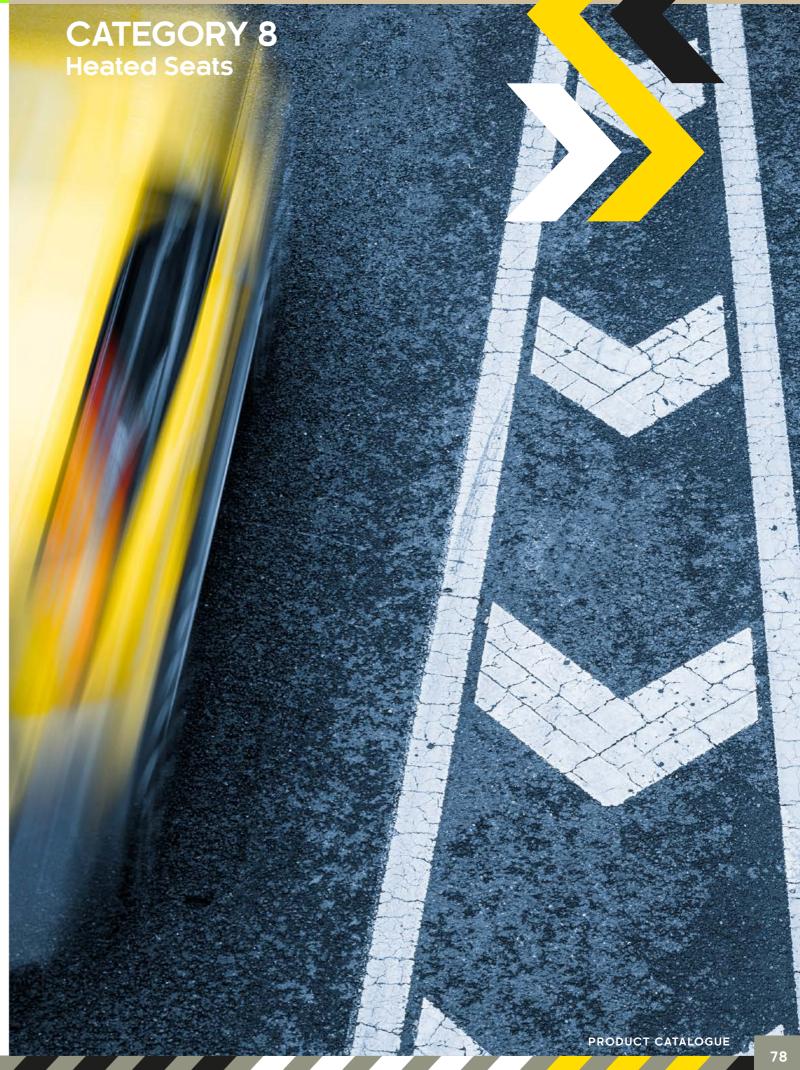

PRODUCT CATALOGUE CALL 02088638333

HEATED SEATS



QZ-CK02/A0(A)

High / Low Switch Split Pad Heated Seats






- 4 pads for one seat
- High / Low / Off Switch
- Pad Dimensions: 138 x 500mm
- 45°C 70°C
- 12 Volt
- EMark E24 certified
- EMC compliant, approved by TUV

QZ-CK01/A0(A)







- 2 pads for one seat
- · High / Low / Off Switch
- Pad Dimensions: 277 x 545mm
- 45°C 70°C
- 12 Volt
- EMark E24 certified
- EMC compliant, approved by TUV

QZ-CK01/A0(D)

3 Stage Heated Seat Pads



- 2 pads for one seat
- 3 stage variable heat settings
- Carbon fibre design
- Resets to off state on power cycle
- Max temp 70°C
- 50W max power consumption
- Current drain 4.2A (max), 2.5A (med) 1.25A (low)
- Dimensions 450 x 280 x 0.3mm
- EMark E24 certified
- EMC compliant, approved by TUV









ACCESSORIES / Control Units



ACCESSORIES / Brackets



CANM8-SCAN



>> CAN Bus Interface

- Speed 12V (1A max) when the vehicle speed is 0 – 15 MPH.
- Reverse 12V (1A max) when reverse gear is selected.
- Left Indicator Continuous 12V (1A max) when the left indicator is active and the vehicle speed is 0 15 MPH
- Right Indicator Continuous 12V (1A max) when the right indicator is active and the vehicle speed is 0 – 15 MPH.
- · Other CAN Bus interfaces also available


AVSMMOD1



>> Indicator Module

- Indicator Control Unit
- Dual voltage: 12V / 24V DC
- Potted to withstand vibration
- Solid state electronics
- Fully waterproof
- Universal fits all known applications
- Compact easily fits under dashboard

AVRRS6



>> Timed Cut Off Switch

- Six-minute timer cut-out
- Auto reset
- Dual voltage: 12V / 24V DC
- IP67 rated sealed against mud, water and vibration
- Dimensions: 30(H) 88(W) 47(D)
- · Can be used with any alarm

AVSPLIMO1



Speed Sensing Device

- · Speed sensing device designed to turn off
- side scan, front sensors or side alarms above a predefined speed.
- Dual voltage: 12V / 24V DC
- Waterproof and dustproof
- Multi-setting speeds available
- Compatible with most quality manufactured products
- · Compact easily fits under

SCAM-SPACER



Side Camera Spacer

 Allows cameras to be mounted further out.
 Product may need to be adapted. For use with all cameras 25mm deep.

CKO-DM-04



Monitor Adaptor

 Knuckle to monitor adaptor for use with C-KO-BRK-04

C-KO-BRACKET



Monitor Bracket

Self-adhesive pad attached to base

DCAM-ANGLE-15



15 Degree Angle Bracket For 650 Series Cams

C-KO-DM-03



Monitor Bracket

Self-adhesive pad attached to base

CKO-BRK-04



Monitor Bracket

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

ACCESSORIES / Brackets



ACCESSORIES / Cables



STALK#CM



ACC-STALK-CM



USB-CHARGE-4



Ceiling Mounted Stalk

Ceiling mounted stalk for monitors and mirror



>> USB Charging Point

- 2 Port USB Socket
- Standard nut installation charger
- Rubber dust cover

- Output voltage: 5V
- Output rating: 3.1A total
- Operating voltage: 12V / 24V DC
- Dimensions: 60mm(W) 40mm(D) 43mm(H)

DCAM-ANGLE-25



TOT-MON/DVR



TOT-MON/DVR-2-01



Surface Mount Adaptors for Dome

• 25" Surface Mount Adaptor


Adaptor Cable for DVR / Monitor

Female 4 Pin aviation connection to RCA and power.

Female to Female 4 Pin

Power not terminated.


CKO-ALM-NS-AVDEL07

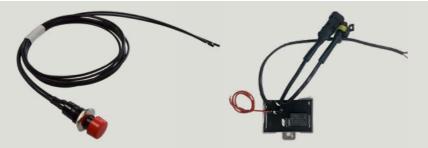

TOT-CAM



K-69671



**** Latched Instant Module with Switch

- ON OFF SWITCH UNIT
- On-off immediate cut out switch
- In cab switch provided
- Auto reset

- 12-24V
- IP67 rated sealed against mud, water and vibration
- 30(H) x 88(W) x 47(D)
- Can be used with any alarm or side scan sensor system

**** Camera Adaptor Cable

Male 4 Pin to Phono male video and Phono male audio. Unterminated bare end for live and earth

Female Cigarette Socket Fused - 5amp

PRODUCT CATALOGUE CALL 02088638333 CALL 02088638333 PRODUCT CATALOGUE sales@c-ko.co.uk sales@c-ko.co.uk

ACCESSORIES / Cables



ACCESSORIES / Cables



CAB-SV-MTR-4PIN-CL









TOT-BARE-FEMALE-2



4 Pin Aviation Screw Cables

- Available in 1, 3, 5, 7.5, 10, 15, 20 & 25 Metre
- Male to female 4 Pin extensions

Bare End Female Aviation

Bare End Female Aviation x 2

TOT-CAM-5



TOT-CAM-7



TOT-DC25



CAB-4SCR-SPLITTER



4 Pin Aviation to Video and Audio Phono and DC Socket

4 Pin Aviation to Video Phono and DC Plug

>> Bare End Power Lead

1 x Male to 2 x Female 4 Pin Splitter





TOT-BARE-MALE-2



GO-CONV-LEAD-01



TOT-MON-/DVR-4



86

>> Bare End Male Aviation

Bare End Male Aviation x 2

4 Pin Aviation to S-Video

Male to Female 4 Pin Monitor/DVR Connection Lead (No Power)

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

ACCESSORIES / Cables



ACCESSORIES / Cables



88

CAB-HSD-4PIN-01



CAB-IP-5MEXT



CKO-RJ45-0.5M



CKO-AI-AD38-Spacer



HSD Female To 4pin Male Lead

5M Extension Cable for IP Cameras

>> RJ45 Cable 0.5M

Spacer for Al Pedestrian Detection Camera

CAB-VOL-CI-01



MAD-PX070



CKO-CAL-AITOOL



CKO-CAM-SIDE-B



>>> Volvo Truck Camera Interface Lead

PX070 RCA Y Connector 1 Female to 2 Male

)) USB Wi-Fi Calibration Tool for Al Camera

Stainless Steel Bracket - Camera Side Mount











Suzi Mounting Bracket 15 PIN

3M, 5M, 10M or 20M 8pin Extension Cable for Al Cameras

Cable has brown signal wire

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

TRODUCT CATALOGOL GALL 0200000000 Suidset Ro.co.uk Suidset Ro.co.uk GALL 0200000000 TRODUCT CATALOGOL

ACCESSORIES / Suzi Kit Cables



ACCESSORIES / Suzi Kit Cables





Tractor Socket for 4 Cameras



Socket for Single Camera







Female Lead x4




- 15 Pin connectors
- 4 x Female aviation leads
- 3 x Bare ended cables



CA-SUZI-MON-4













- 4 x Male aviation leads
- 3 x Bare ended cables



CAV-TRAILER-1-V

CAV-TRACTOR-1-V



Socket for One Camera

Male 4 Pin

Male Lead x1

CA-SUZI-COIL-15PIN

4 Metre 15 Core Electrical Coil









CAV20-40











- Yellow 24N Connectors
- Compatible with blue label sockets
- 4 Metre 7 Core

CALL 02088638333 sales@c-ko.co.uk PRODUCT CATALOGUE CALL 02088638333 PRODUCT CATALOGUE sales@c-ko.co.uk



PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

ACCESSORIES / Suzi Kit Cables



ACCESSORIES / Suzi Kit Cables



CAV-TRACTOR-2

Socket for Two Cameras



24S Tractor Suzi Socket One Camera, Two Fly Leads









Female Lead x2



Female 4 Pin x 2



Female Lead x1

24S-Tractor-1

24S Socket

- Single camera connection
- 2 fly leads

CAV-TRAILER-2

Socket for Two Cameras








24S Trailer Suzi Socket One Camera,





7 Pin



Male Lead x2



Male 4 Pin x 2





Male Lead x1



- 24S Socket
- Single camera connection
- 2 fly leads



Orange with Inverted 24N Connectors





7 Pin 24S Suzi Loose Coil Cable 3M





7 Core



- Inverted large pin to avoid incorrect connection of camera system to other equipment
- Compatible with orange label sockets
- 4 Metre 7 Core





- 24S Connectors
- 3 Metre 7 Core

PRODUCT CATALOGUE CALL 02088638333 CALL 02088638333 PRODUCT CATALOGUE sales@c-ko.co.uk sales@c-ko.co.uk

ACCESSORIES / Suzi Kit Cables



CATEGORY 10

Consumables

CAB-4PIN-12/24

24 Volt to 12 Volt Dropper





4 Pin aviation connection

CA-SW-I-4PIN

4 Pin Intelligent Switcher





- Automatically Detects and
- Switches when Suzi Connected
- Compatible with D1, AHD & 1080p cameras
- 2 Camera input 1 Video output
- 4 Pin aviation connection
- 12V DC Dimensions: 111mm x 63mm x 31mm



CAMERA SYSTEM

- Automatically detects connection of second camera.
- Ideal for increasing artic safety with an additional
- camera on the rear of the tractor.
- · Use with CKO suzi cables and connectors.
- Additional 4 Pin cables of various lengths available.

STICKER-SET1





Selection of Vinyl Decals (CCTV, **Angles Morts)**


PRODUCT CATALOGUE

PV-3S-12-24V



24Vdc - 12Vdc Converter

CALL 02088638333 sales@c-ko.co.uk

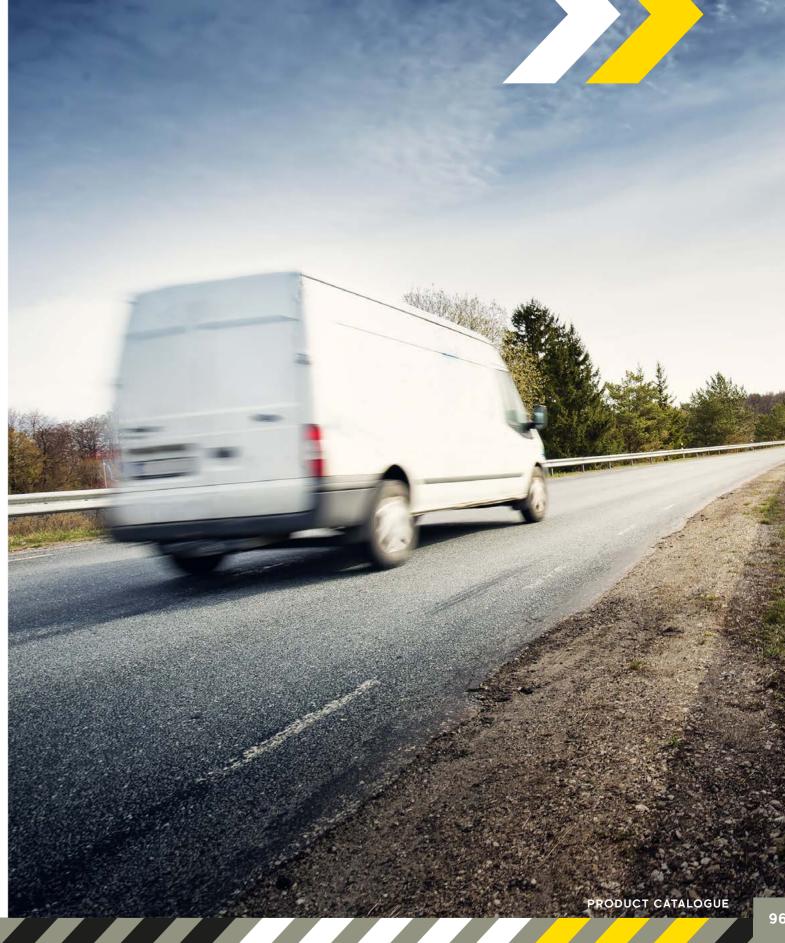


CONSUMABLES



CONSUMABLES




FUSEHOLDER-FU8-A



FUSEHOLDER-FU8-B-25



K-69682



K-69666



Standard Blade Fuse Holder White Pack of 25



Fuse Tap Small Micro2

Mini Blade Fuse Holder

Female Cigarette Socket Unfused

1.5M

CKO-FU32



FH-205/210



K-69671



K-69677



Mini Blade Fuses
Pack of 25, 7.5A / 10.0A



Female Cigarette Sockets Fused 5amp

Female Cigarette Socket Unfused





K-69681



CONDUIT-SCON1/1A/2/2A



Piggy Back Fuse Holder 7.5amp for Mini Blades Fuse





- CONDUIT-SCON1 6.5mm 10.0mm x 25M
- CONDUIT-SCON1A 6.5mm 10mm x 50M
- CONDUIT-SCON2A 10.1mm 13.0mm x 50M

98

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

CONSUMABLES



CONSUMABLES




TL-SCTOPEN-LARGE



TIES-TR



RY7



>> Split Convoluted Tubing Opener

- Small 6.5mm 14.5mm
- Large 16.9mm 23.1mm

LOCAA319-0.5

Nylon Cable Ties x 100

- 370mm X 4.8mm
- · Others available

5 Pin 12 Volt 20/30A Changeover Relay


RY8

AA 319
LOCTITE.

REAL VIEW MIRROR BONDE

PROPERTY OF STATEMENT OF STAT

١



Loctite AA 319 0.5ml

Mirror Bonder

5 Pin 24 Volt 20/30A Changeover Relay

TAPE-T1-N



TAPE-T29



SW-ROC



PVC Tape Pack of 8


19mm x 20M

>>> Woven Cloth Tape

19mm x 25M

Rocker Switch - Standard

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk call 02088638333 PRODUCT CATALOGUE

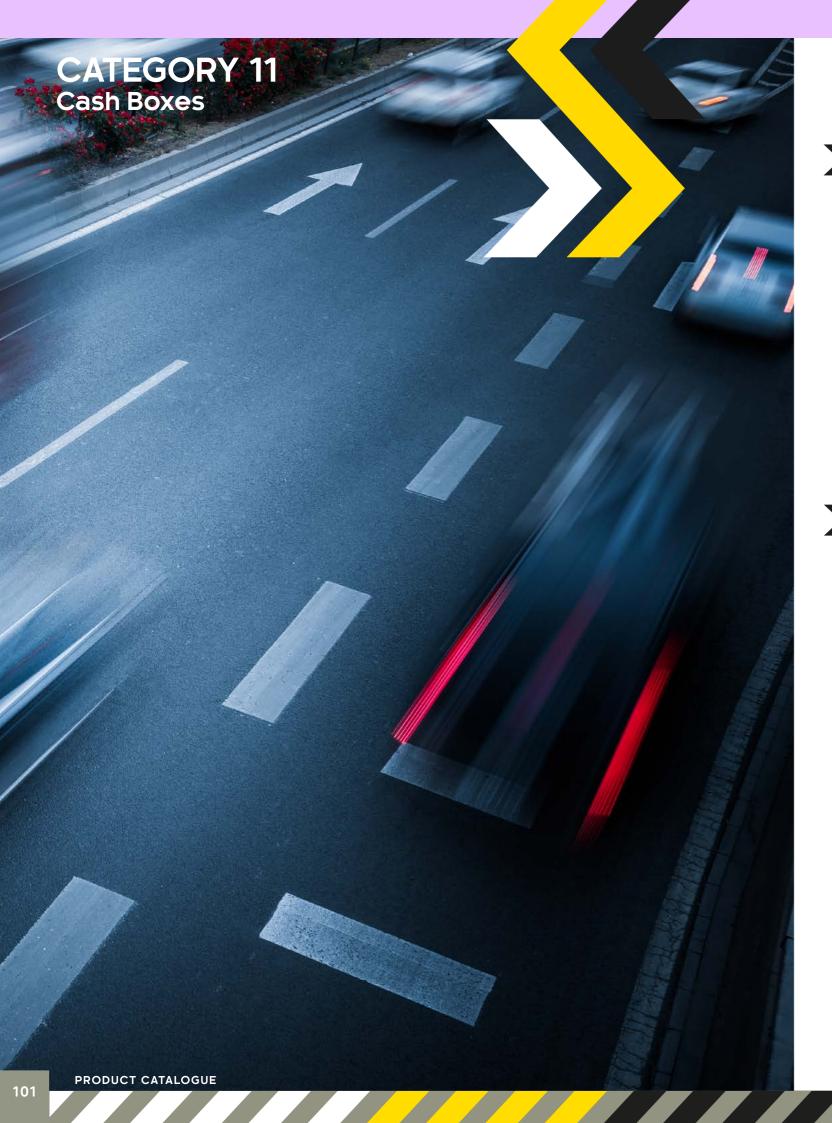

CASH BOXES



CASHBOX-F

4 Compartment Cash Box






- High Impact ABS with Mild Steel support
- Light weight yet very strong drivers cash box with 2 mild steel fixing points that will fit most standard hooks or can be utilised with our mounting plate
- 4 Compartments

CASHBOX-MOUNT

Cash Box Mounting Plate



102

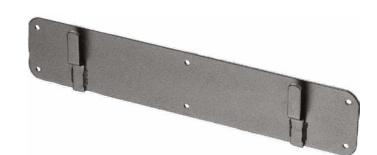

- Heavy duty drivers Cash Box mounting plate
- Easy fix mounting

sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

CALL DECOUDED TRODUCT CATALOGUE



BEACONS / 8 LED



CKO-LED-211-1B-A

Amber Beacon 8 LED 1 Bolt



- Lens: Amber
 - Fixing: 1Bolt
 - Approval: ECE R10 / R65
 - Voltage: 9-30v
 - IP Rating: IP67
 - LEDs: 8
 - Patterns: 4 Selectable Flash Patterns
- Dimensions: 110mm x 130mm
- Flash pattern programming via push button under lens
- Polycarbonate lens
- -30°to +60°operating temperature

CKO-LED-211-3B-A



Amber Beacon 8 LED 3 Bolt

- Fixing: 3 Bolt
- Dimensions: 104mm x 154mm

CKO-LED-211-FD-A



Amber Beacon 8 LED Flexi Din

- Fixing: Flexi Din
- Dimensions: 195mm x 130mm

CKO-LED-211-M-A



Amber Beacon 8 LED Magnetic Mount

- Fixing: Magnetic Mount
- Dimensions: 118mm x 154mm

CKO-LED-BRACKET1



Pole Mount Bracket for Flexi Din

104

- Made from Iron
- Dimensions 102 x 24mm
- Only used with flexi din stem products

sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

BEACONS / 12 LED



BEACONS / 16 LED



CKO-LED-221-1B-A

Amber Beacon 12 LED 1 Bolt



CKO-LED-210-1B-A

Amber Beacon 16 LED 1 Bolt





- Approval: ECE R10 / R65
- Voltage: 10-30v
- IP Rating: IP67
- LEDs: 12
- Patterns: 4 Selectable Flash Patterns
- Dimensions: 107mm x 119mm (67mm height exc. bolt)
- Flash pattern programming via push button under lens
- Polycarbonate lens
- -30°to +60°operating temperature



Lens: Amber

- Fixing: 1Bolt
- Approval: ECE R10 / R65
- Voltage: 9-30v
- IP Rating: IP67
- LEDs: 16
- Patterns: 4 Selectable Flash Patterns
- Dimensions: 150mm x 130mm
- Flash pattern programming via push button under lens
- Polycarbonate lens
- -30°to +60°operating temperature

CKO-LED-221-3B-A



Amber Beacon 12 LED 3 Bolt

Dimensions: 61mm x 145mm

CKO-LED-221-FD-A



Amber Beacon 12 LED Flexi Din

- Fixing: Flexi Din
- Dimensions: 152mm x 119mm

CKO-LED-210-3B-A



Amber Beacon 16 LED 3 Bolt

- Fixing: 3 Bolt
- Dimensions: 144mm x 154mm

CKO-LED-210-FD-A



Amber Beacon 16 LED Flexi Din

- Fixing: Flexi Din
- Dimensions: 235mm x 130mm

CKO-LED-221-M-A

Fixing: 3 Bolt



Amber Beacon 12 LED Magnetic Mount

Fixing: Magnetic Mount

Dimensions: 90mm x 119mm

CKO-LED-BRACKET1



Pole Mount Bracket for Flexi Din

- Made from Iron
- Dimensions 102 x 24mm
- Only used with flexi din stem products

CKO-LED-210-M-A



Amber Beacon 16 LED Magnetic Mount

- Fixing: Magnetic Mount
- Dimensions: 235mm x 130mm

CKO-LED-BRACKET1



Pole Mount Bracket for Flexi Din

- Made from Iron
- Dimensions 102 x 24mm
- Only used with flexi din stem products
- PRODUCT CATALOGUE CALL 02088638333 CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk PRODUCT CATALOGUE

BEACONS / 24 LED



BEACONS / 60 LED, AMBER



CKO-LED-255-1B-A

Amber Beacon 24 LED 1 Bolt Airport Approved



>>>



CKO-LED-209-1B-A





- · Lens: Amber
- Fixing: 1 Bolt
- Approval: ECE R10 / R65 / ICAO / CAP168
- Voltage: 9-30v
- IP Rating: IP67
- LEDs: 24
- Patterns: 7 Selectable Flash Patterns

- Dimensions: 81mm x 130mm
- Flash pattern programming via push button under lens
- Airport Approved
- Polycarbonate lens
- -30°to +60°operating temperature
- Also available with a magnetic mount fixture (CKO-LED-255-M-A)



Lens: Amber

- Fixing: 1Bolt
- Approval: ECE R10
- Voltage: 12-24V
- IP Rating: IP66
- LEDs: 60
- Patterns: 3 Selectable Flash Patterns
- Dimensions: 175mm x 140mm
- Flash pattern programming via dip switches
- Life-span in excess of 10000
- Tough and durable ABS base
- Polycarbonate lens
- -30°to +50°operating temperature

CKO-LED-270-1B-A



Amber Beacon 24 LED 1 Bolt

Dimensions: 122mm x 130mm

(166mm height inc bolt)



- Fixing: 3 Bolt
- Dimensions: 122mm x 130mm

CKO-LED-270-3B-A



Amber Beacon 24 LED 3 Bolt

CKO-LED-209-3B-A



Amber Beacon 60 LED 3 Bolt

- Fixing: 3 Bolt
- Dimensions:175mm x 140mm

CKO-LED-209-FD-A



- Dimensions: 175mm x 140mm

CKO-LED-270-FD-A

Fixing: 1Bolt



Amber Beacon 24 LED Flexi Din

Fixing: Flexi Din

107

Dimensions: 213mm x 130mm

CKO-LED-270-M-A



Amber Beacon 24 LED Magnetic Mount

- Fixing: Magnetic Mount
- Dimensions: 130mm x 130mm



- Fixing: Magnetic Mount



Amber Beacon 60 LED Flexi Din

- Fixing: Flexi Din

CKO-LED-209-M-A



CKO-LED-BRACKET1



Amber Beacon 60 LED Magnetic Mount

- Dimensions: 171mm x 127mm

Pole Mount Bracket for Flexi Din

- Made from Iron
- Dimensions 102 x 24mm
- Only used with flexi din stem products

CALL 02088638333 **PRODUCT CATALOGUE** sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

BEACONS / 60 LED, GREEN



CKO-LED-209-1B-G

Green Beacon 60 LED 1 Bolt





- Lens: Green
- Fixing: 1 Bolt
- Approval: ECE R10
- Voltage: 12-24V
- IP Rating: IP66
- LEDs: 60
- Patterns: 3 Selectable Flash Patterns
- Dimensions: 175mm x 140mm
- Flash pattern programming via dip switches
- Life-span in excess of 10000
- Tough and durable ABS base
- Polycarbonate lens
- -30°to +50°operating temperature

CKO-LED-209-3B-G



- Green Beacon 60 LED 3 Bolt
- Fixing: 3 Bolt
- Dimensions: 175mm x 140mm

CKO-LED-209-FD-G



Green Beacon 60 LED Flexi Din

- Fixing: Flexi Din
- Dimensions: 175mm x 140mm

CKO-LED-209-M-A



- Green Beacon 60 LED Magnetic Mount
- Fixing: Magnetic Mount

PRODUCT CATALOGUE

Dimensions: 171mm x 127mm

CKO-LED-BRACKET1



Pole Mount Bracket for Flexi Din

- Made from Iron
- Dimensions 102 x 24mm
- Only used with flexi din stem products

CALL 02088638333 sales@c-ko.co.uk



>>>

LIGHT BARS / MINI LIGHT BARS



CKO-LED-116-1B-A

Amber 248mm Mini Light Bar - Single Bolt



- · Light Colour: Amber
- Lens: Clear
- Fixing: Single Bolt (M12)
- Approval: ECE R10/R65
 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 60
- Patterns: 26 Selectable Flash
 Patterns
- Additional: Cable with switch included with bolt fixings

- Dimensions: 248mm x 171mm x 37mm (73mm inc. bolt)
- · Ultra slim design
- Reverse polarity protection
- Integrated lens design to base provides excellent optical effect
- -30° to +60° operating temperature
- Synchronisation wire for multiple lights

LIGHT BARS / MINI LIGHT BARS



CKO-LED-112-1B-A

Amber 310mm Mini Light Bar - Single Bolt



- Light Colour: Amber
- Lens: Clear
- Fixing: Single Bolt
- Approval: ECE R10/R65 Approved
- Voltage: 9-30v
- IP Rating: IP65
- LEDs: 72
- Patterns: 8 Selectable Flash
 Patterns
- Additional: Cable with switch included with bolt fixings

- Dimensions: 310mm x 159mm x 75mm
- Life-span in excess of 10000 hours
- Tough and durable ABS base, polycarbonate lens
 -30° to +50° operating
- temperature
- 300mm Cable length
- Synchronisation wire for multiple lights
- Includes wired switch and flash pattern controller for optional in cab light control

CKO-LED-116-M-A



- Amber 248mm Mini Light Bar Magnetic Mount
- Fixing: Dual Magnetic Mount
- Dimensions: 248mm x 171mm x 37mm (55mm inc. magnet)

CKO-LED-114-M-A



- Amber 270mm Mini Light Bar Magnetic Mount
- Fixing: Dual Magnetic Mount
- Dimensions: 270mm x 160mm x 49mm (67mm inc. magnet)

CKO-LED-112-M-A



- Amber 310mm Mini Light Bar Magnetic Mount
- Fixing: Dual Magnetic Mount
- Dimensions: 310mm x 159mm x 75mm

CKO-LED-117-M-A



Amber 363mm Mini Light Bar - Magnetic Mount

- Fixing: Dual Magnetic Mount
- Dimensions: 363mm x 171mm x 37mm (59mm inc. magnet)

CKO-LED-114-1B-A

Amber 270mm Mini Light Bar - Single Bolt



- · Light Colour: Amber
- Lens: Clear
- Fixing: Single Bolt (M12)
- Approval: ECE R10/R65
 Approved
 Integrate provide
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 60
- Patterns: 26 Selectable Flash Patterns
- Additional: Cable with switch included with bolt fixings

- Dimensions: 270mm x 160mm x 49mm (85mm inc. bolt)
- Reverse polarity protection
- Integrated lens design to base provides excellent optical effect
- -30° to +60° operating temperature
- Synchronisation wire for multiple lights

CKO-LED-117-1B-A









- Light Colour: Amber
- Lens: Clear
- Fixing: Single Bolt (M12)
- Approval: ECE R10/R65 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 72
- Patterns: 26 Selectable Flash
 Patterns
- Additional: Cable with switch included with bolt fixings

- Dimensions: 363mm x 171mm x 37mm (73mm inc. bolt)
- Ultra slim design
- Reverse polarity protection
- Integrated lens design to base provides excellent optical effect
- -30° to +60° operating temperature
- Synchronisation wire for multiple lights

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

LIGHT BARS / MINI LIGHT BARS



LIGHT BARS / MINI LIGHT BARS



CKO-LED-117-2B-A

CKO-LED-156-B-A

Amber 363mm Mini Light Bar - Dual Bolt



- Light Colour: Amber
- Lens: Clear
- Fixing: Dual Bolt (M12)
- Approval: ECE R10/R65 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 72
- Patterns: 26 Selectable Flash Patterns
- Additional: Cable with switch included with bolt fixings

- Dimensions: 363mm x 171mm x 37mm (73mm inc. bolt)
- Ultra slim design
- Reverse polarity protection
- Integrated lens design to base provides excellent optical effect
- -30° to +60° operating temperature
- Synchronisation wire for multiple lights

Amber 585mm Mini Light Bar - Bolt Fixing



- Light Colour: Amber
- Lens: Clear
- Fixing: Bracket
- Approval: ECE R10/R65
 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 200
- Patterns: 26 Selectable Flash Patterns
- Additional: Cable with switch included

- Dimensions: 585mm x 295mm x 53mm (100mm inc. brackets)
- 4 Bolt Bracket for secure fitment
- Reverse polarity protection
- -30° to +60° operating temperature
- Synchronisation wire for multiple lights

CKO-LED-138-1B-A

113

Amber/Black 248mm Mini Light Bar - Single Bolt



- · Light Colour: Amber
- Lens: Clear with Black Lid
- Fixing: Single Bolt (M12)
- Approval: ECE R10/R65 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 60
- Patterns: 26 Selectable Flash Patterns
- Additional: Cable with switch included with bolt fixings

- Dimensions: 248mm x 171mm x 37mm (73mm inc. bolt)
- Ultra slim design
- Reverse polarity protection
- Integrated lens design to base provides excellent optical effect
- -30° to +60° operating temperature
- Synchronisation wire for multiple lights

CKO-LED-138-M-A





- Fixing: Dual Magnetic Mount
- Dimensions: 248mm x 171mm x 37mm (55mm inc. magnet)

CKO-LED-139-M-A



Amber/Black 363mm Mini Light Bar - Magnetic Mount

- Fixing: Dual Magnetic Mount
- Dimensions: 363mm x 171mm x 37mm (59mm inc. magnet)

CKO-LED-139-1B-A

Amber/Black 363mm Mini Light Bar -Single Bolt



- Light Colour: Amber
- Lens: Clear with Black Lid
- Fixing: Single Bolt (M12)
- Approval: ECE R10/R65 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 72
- Patterns: 26 Selectable Flash Patterns
- Additional: Cable with switch included with bolt fixings

- Dimensions: 363mm x 171mm x 37mm (73mm inc. bolt)
- Ultra slim design
- Reverse polarity protection
- Integrated lens design to base provides excellent optical effect
- -30° to +60° operating temperature
- Synchronisation wire for multiple lights

CKO-LED-BRACKETO

Mini Light Bar Bracket



114



- Bracket kit to fit Mini Light Bars
- Made from galvanised steel
- Kit comes with foam pads and bolts
- Dimensions 240 x 100 x 100mm
- Lifts the product off the roof of the vehicle by 100mm and used in conjunction with a low profile LED mini bar to increase visibility

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 0208863833 PRODUCT CATALOGUE

LIGHT BARS / STANDARD LIGHT BARS



LIGHT BARS / STANDARD LIGHT BARS



CKO-LED-711-B-A

Amber Light Bar 600mm Bolt Mounted



- Light Colour: Amber
- Lens: Clear
- Fixing: Bolt Bracket
- Approval: ECE R10/R65 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 108
- Patterns: 27 Selectable Flash
 Patterns
- Additional: Cable with switch included

- Dimensions: 600mm x 100mm x 45mm
- Tough polycarbonate lens with UV resistance
- Aluminium base
- Reverse polarity protection
- Clear Lens
- -30°C to +60°C operating temperature
- Also available with a magnetic mount fixture (CKO-LED-711-M-A)

CKO-LED-775-B-A

Amber Light Bar 1500mm Bolt Mounted



- · Light Colour: Amber
- Lens: Clear
- Fixing: Bolt Bracket
- Approval: ECE R10/R65
- Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 252
- Patterns: 27 Selectable Flash
 Patterns
- Additional: Cable with switch included

- Dimensions: 1500mm x 100mm x 45mm
- Tough polycarbonate lens with UV resistance
- Aluminium base
- Reverse polarity protection
- Clear Lens
- -30°C to +60°C operating temperature

CKO-LED-772-B-A

Amber Light Bar 900mm Bolt Mounted



- Light Colour: Amber
- Lens: Clear
- Fixing: Bolt Bracket
- Approval: ECE R10/R65
 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 156
- Patterns: 27 Selectable Flash
 Patterns
- Additional: Cable with switch included

- Dimensions: 900mm x 100mm x 45mm
- Tough polycarbonate lens with UV resistance
- Aluminium base
- Reverse polarity protection
- Clear Lens
- -30°C to +60°C operating temperature



Amber Light Bar with Black Lid 600mm Bolt Mounted





- Lens: Clear with Black Lid
- Fixing: Bolt Bracket
- Approval: ECE R10/R65
 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 164
- Patterns: 27 Selectable Flash
 Patterns
- Additional: Cable with switch included

- Dimensions: 600mm x 215mm x 44mm
- Built in traffic controller
- Tough polycarbonate lens with UV resistance
- Reverse polarity protection
- Clear Lens
- -30°C to +60°C operating temperature



Amber Light Bar 1200mm Bolt Mounted



- Light Colour: Amber
- Lens: Clear
- Fixing: Bolt Bracket
- Approval: ECE R10/R65
 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 204
- Patterns: 27 Selectable Flash
 Patterns
- Additional: Cable with switch included

- Dimensions: 1200mm x 100mm x 45mm
- Tough polycarbonate lens with UV resistance
- Aluminium base
- Reverse polarity protection
- Clear Lens
- -30°C to +60°C operating temperature



CKO-LED-782-B-A

Amber Light Bar with Black Lid 900mm Bolt Mounted



116

- Light Colour: Amber
- Lens: Clear with Black Lid
- Fixing: Bolt Bracket
- Approval: ECE R10/R65
 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 224
- Patterns: 27 Selectable Flash
 Patterns
- Additional: Cable with switch included

- Dimensions: 900mm x 215mm x 44mm
- · Built in traffic controller
- Tough polycarbonate lens with UV resistance
- Reverse polarity protection
- Clear Lens
- -30°C to +60°C operating
- temperature

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk call 0208863833 PRODUCT CATALOGUE

LIGHT BARS / STANDARD LIGHT BARS



CKO-LED-783-B-A

Amber Light Bar with Black Lid 1200mm Bolt



- Light Colour: Amber
- Lens: Clear with Black Lid
- Fixing: Bolt Bracket
- Approval: ECE R10/R65 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 284
- Patterns: 27 Selectable Flash Patterns
- Additional: Cable with switch included

- Dimensions: 1200mm x 215mm x
- Built in traffic controller
- Tough polycarbonate lens with UV resistance
- Reverse polarity protection
- Clear Lens
- -30°C to +60°C operating temperature



Amber Light Bar with Black Lid 1500mm Bolt Mounted




- Light Colour: Amber
- Lens: Clear with Black Lid
- Fixing: Bolt Bracket
- Approval: ECE R10/R65 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 344
- Patterns: 27 Selectable Flash Patterns
- Additional: Cable with switch included

- Dimensions: 1500mm x 215mm x 44mm
- Built in traffic controller
- Tough polycarbonate lens with UV resistance
- Reverse polarity protection
- Clear Lens
- -30°C to +60°C operating temperature

CKO-LED-786-B-A

Amber Light Bar with Black Lid 1800mm Bolt Mounted




- Light Colour: Amber
- Lens: Clear with Black Lid
- Fixing: Bolt Bracket
- Approval: ECE R10/R65 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 404
- Patterns: 27 Selectable Flash
- Additional: Cable with switch included

- Dimensions: 1800mm x 215mm x
- Built in traffic controller
- Tough polycarbonate lens with UV resistance

sales@c-ko.co.uk

- Reverse polarity protection
- Clear Lens
- -30°C to +60°C operating temperature





STROBES / STROBE LIGHTS



STROBES / STROBE LIGHTS



CKO-LED-3H707-A

Amber Strobe 3 LED Ultra Slim



- Colour: Amber
- Also available in the colours Blue (CKO-LED-3H707-B), Red (CKO-LED-3H707-R) and White (CKO-LED-3H707-W)
- Fixing: Bolt / Self Adhesive
- Approval: ECE R10 / R65
- Voltage:12-24V
- IP Rating: IP67
- LEDs: 3
- Patterns: 26 Selectable Flash

- Dimensions: 82mm x 31mm x
- Tough polycarbonate lens with UV resistance
- Aluminium base with heat dissipation
- Reverse polarity protection
- Synchronise up to 15 strobes
- Clear Lens
- -30°C to +60°C operating temperature

CKO-LED-4H709-A

- Fixing: Bolt
- Approval: ECE R10 / R65

(CKO-LED-4H709-W)

Voltage:12-24V

Colour: Amber


- IP Rating: IP69K
- LEDs: 4
- Patterns: 21 Selectable Flash Patterns

Amber Strobe 4 LED Slim

Also available in the colours

Blue (CKO-LED-4H709-B), Red

(CKO-LED-4H709-R) and White



- Tough polycarbonate lens with **UV** resistance
- Die-cast Aluminium base with heat dissipation
- Foam gasket
- Reverse polarity protection
- Synchronise up to 14 strobes
- Clear Lens
- -30°C to +60°C operating temperature

CKO-LED-3H709-A

Amber Strobe 3 LED Slim



- Colour: Amber
- Also available in the colours Blue (CKO-LED-3H709-B), Red (CKO-LED-3H709-R) and White (CKO-LED-3H709-W)
- Fixing: Bolt
- Approval: ECE R10 / R65
- Voltage:12-24V
- IP Rating: IP69K
- LEDs: 3
- Patterns: 21 Selectable Flash **Patterns**

- Dimensions: 77mm x 29mm x 10mm
- Tough polycarbonate lens with **UV** resistance
- Die-cast Aluminium base with heat dissipation
- Foam gasket
- Reverse polarity protection
- Synchronise up to 14 strobes
- Clear Lens
- -30°C to +60°C operating temperature

CKO-LED-6H707-A

Amber Strobe 6 LED Ultra Slim



Colour: Amber

- Also available in the colours Blue (CKO-LED-6H707-B), Red (CKO-LED-6H707-R) and White (CKO-LED-6H707-W)
- Fixing: Bolt / Self Adhesive
- Approval: ECE R10 / R65
- Voltage:12-24V
- IP Rating: IP67
- LEDs: 6
- Patterns: 26 Selectable Flash

- Patterns

- Dimensions: 131mm x 31mm x 6.6mm
- Tough polycarbonate lens with UV resistance
- Aluminium base with heat dissipation
- Reverse polarity protection
- Synchronise up to 15 strobes
- Clear Lens
- -30°C to +60°C operating temperature



119

Amber Strobe 4 LED Ultra Slim



- Colour: Amber
- Also available in the colours Blue (CKO-LED-4H707-B), Red (CKO-LED-4H707-R) and White (CKO-LED-4H707-W)
- Fixing: Bolt / Self Adhesive
- Approval: ECE R10 / R65
- Voltage:12-24V
- IP Rating: IP67
- LEDs: 4
- Patterns: 26 Selectable Flash Patterns


- Dimensions: 92mm x 31mm x
 - Tough polycarbonate lens with **UV** resistance
 - Aluminium base with heat dissipation
 - Reverse polarity protection
 - Synchronise up to 15 strobes
 - Clear Lens
 - -30°C to +60°C operating temperature

CKO-LED-6H709-A





120



- Also available in the colours Blue (CKO-LED-6H709-B), Red (CKO-LED-6H709-R) and White (CKO-LED-6H709-W)
- Fixing: Bolt
- Approval: ECE R10 / R65
- Voltage:12-24V
- IP Rating: IP69K
- LEDs: 6
- Patterns: 21 Selectable Flash Patterns

- Dimensions: 113mm x 29mm x
- Tough polycarbonate lens with **UV** resistance
- Die-cast Aluminium base with heat dissipation
- Foam gasket
- Reverse polarity protection
- Synchronise up to 14 strobes
- Clear Lens
- -30°C to +60°C operating temperature

CALL 02088638333 CALL 02088638333 **PRODUCT CATALOGUE** sales@c-ko.co.uk sales@c-ko.co.uk PRODUCT CATALOGUE

STROBES / STROBE LIGHTS



CKO-LED-6H706-A-DI

Amber Strobe with Amber Directional Indicator



- Colour: Amber with Amber outer
- Fixing: Bolt
- Approval: ECE R10 / R65 / R148
- Voltage:12-24V
- IP Rating: IP67
- LEDs: 6 Amber Warning / 18
 Outer
- Patterns: 21 Selectable Flash Patterns
- Dimensions: 132mm x 51mm x
 19mm Patterns

- Dual function as a directional indicator light and a warning light
- Tough polycarbonate lens with UV resistance
- Die-cast Aluminium base with heat dissipation
- Foam gasket
- Reverse polarity protection
- Synchronise up to 14 strobes
- Clear Lens
- -30°C to +60°C operating temperature

STROBES / STROBE LIGHTS



CKO-LED-BRACKET7



>> Strobe Light Bracket 115mm

- Made from iron
- Dimensions 115 x 63 x 20mm
- Mounting plate for all 4 LED strobe

CKO-LED-BRACKET8



Strobe Light Bracket 142mm

- Made from iron
- Dimensions 142 x 63 x 20mm
- Mounting plate for all 6 LED / 12 LED strobe models

CKO-LED-6H706-A-RV

Amber Strobe with White for Reverse



- Colour: Amber with White outer
- Fixing: Bolt
- Approval: ECE R10 / R65 / R148
- Voltage:12-24V
- IP Rating: IP67
- LEDs: 6 Amber Warning / 18 Outer
- Patterns: 21 Selectable Flash Patterns
- Dimensions: 132mm x 51mm x
 19mm

- Dual function as a reverse light and a warning light
- Tough polycarbonate lens with UV resistance
- Die-cast Aluminium base with heat dissipation
- Foam gasket
- Reverse polarity protection
- Synchronise up to 14 strobes
- Clear Lens
- -30°C to +60°C operating temperature

CKO-LED-704-A

Amber Curved Strobe 12 LED







- · Colour: Amber
- Fixing: Bolt or Bracket
- Approval: ECE R10 / R65
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 12
- Patterns: 26 Selectable Flash Patterns
- Dimensions: 170mm x 80mm x 30mm

- Tough polycarbonate lens with UV resistance
- Aluminium base with heat dissipation
- Reverse polarity protection
- Synchronise up to 15 strobes
- Clear Lens
- -30°C to +60°C operating temperature

CKO-LED-6H706-A-ST

121

Amber Strobe with Red Tail Light





- Fixing: Bolt
- Approval: ECE R10 / R65 / R148
- Voltage:12-24V
- IP Rating: IP67
- LEDs: 6 Amber Warning / 18
 Outer
- Patterns: 21 Selectable Flash Patterns
- Dimensions: 132mm x 51mm x 19mm

- Dual function as a tail light and a warning light
- Tough polycarbonate lens with UV resistance
- Die-cast Aluminium base with heat dissipation
- Foam gasket
- Reverse polarity protection
- Synchronise up to 14 strobes
- Clear Lens
- -30°C to +60°C operating temperature



Amber Strobe 6 LED Ultra slim



122



- Colour: Amber
- Fixing: Bolt or Bracket
- Approval: ECE R10 / R65
- Voltage: 12-24V
- IP Rating: IP69K
- LEDs: 12
- · Additional: Bracket included
- Patterns: 21 Selectable Flash
 Patterns
- Dimensions: 108mm x 34mm x 27mm
- Tough polycarbonate lens with UV resistance
- Foam gasket
- Reverse polarity protection
- Synchronise up to 14 strobes
- Clear Lens
- -30°C to +60°C operating temperature

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

STROBES / STROBE LIGHTS



STROBES / MARKER LIGHTS



CKO-LED-301-A

Hideaway Stem Strobe 2 LED



CKO-LED-848-A-AMP

Amber Side Marker Reflector Lamp with AMP









- Colour: Amber
- Fixing: Bolt or Self Adhesive
- Approval: ECE R10 / R65
- Voltage: 12-24V
- IP Rating: IP69K
- LEDs: 2
- Patterns: 21 Selectable Flash Patterns
- Dimensions: 32mm x 26mm



- Light Colour: Amber
- Lens: Amber
- Fixing: Bracket
- Approval: ECE R10/R3/R91
- Voltage: 12-24V
- IP Rating: IP65
- LEDs: 3

- Additional: AMP connector
- Dimensions: 100mm x 45mm x 15mm
- Oval style reflector / lamp
- Includes mounting bracket
- **ABS Housing**
- PMMA Lens

CKO-LED-308-A

Amber Octagon Strobe 4 LED



- Colour: Amber
- Fixing: Bolt or Bracket
- Approval: ECE R10 / R65
- Voltage: 12-24V
- IP Rating: IP69K
- LEDs: 4
- Additional: Bracket included
- Patterns: 21 Selectable Flash Patterns
- Dimensions: 27mm x 27mm x 39mm (24mm Diameter)

- Tough polycarbonate lens with UV resistance
- Reverse polarity protection
- Synchronise up to 14 strobes
- Clear Lens
- Includes mounting bracket
- -30°C to +60°C operating temperature



Amber Side Marker Lamp with Reflex Reflector





Light Colour: Amber

- Lens: Amber
- Fixing: Bracket
- Approval: ECE R10/R3/R91
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 6
- Dimensions: 115mm x 70mm x
- Includes mounting bracket
- Zinc Housing
- Polycarbonate Lens
- With AMP version also available (CKO-LED-849 -A-AMP)



Amber Octagon Strobe 5 LED









- Fixing: Bolt or Surface Mount
- Approval: ECE R10 / R65
- Voltage: 10-30V
- IP Rating: IP67

- LEDs: 5
- Patterns: 10 Selectable Flash Patterns
- Dimensions: 60mm x 60mm x 7mm
- Slim Light Head
- Clear Lens
- Aluminium Base Polycarbonate Lens
- Synchronisation / alternative synchronisation supported

CKO-LED-853

5 Function Tail Light with Progressive Indicator



124



- Light Colour: Multiple
- Lens: Clear
- Fixing: Surface
- Approval: ECE R10/R3/R6/R7/ R23/R38
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 68

- Dimensions: 284mm x 100mm x
- Multi Function Tail Light with
- · Stop, Tail, Turn, Reverse and Fog light all in one
- ABS / Polycarbonate Housing
- Polycarbonate Lens

CALL 02088638333 CALL 02088638333 **PRODUCT CATALOGUE** sales@c-ko.co.uk sales@c-ko.co.uk PRODUCT CATALOGUE



WORK LIGHTS / WHITE SCENE LIGHT



CKO-LED-SL2800W-A

White Scene Light with Amber Mark-





- · Colour: White with Amber
- Lumens: 2800
- Beam Pattern: Flood
- Approval: ECE R10 / R148
- Fixing: Screw fix surface mount
- Voltage: 10-30V
- IP Rating: IP69K
- LEDs: 4

- Dimensions: 200mm x 57.4mm x
- Aluminium housing
- Polycarbonate lens
- Also available with a **R65** approved Amber Marker (CKO-LED-SL2800W-R65)












White Scene Light with White Marker





Colour: White with Red Marker

CKO-LED-SL2800W





· Colour: White





Scene Light Housing

sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

WORK LIGHTS



WORK LIGHTS



CKO-LED-WL604-S

Square Work Lamp 4 LED Spot



CKO-LED-WL601-S

Rectangular Work Lamp 6 LED Spot







- Colour: White
- Lumens: 1080
- Beam Pattern: Spot
- Approval: ECE R10
- Fixing: Bolt Bracket
- Voltage: 12-80V

- IP Rating: IP67
- LEDs: 4
- Dimensions: 73mm x 110mm x 42mm
- Aluminium housing
- PMMA lens



- Colour: White
- Lumens: 1260
- Beam Pattern: Spot
- Approval: ECE R10
- Fixing: Bolt
- Voltage: 12-80V

- IP Rating: IP67
- LEDs: 6
- Dimensions: 160mm x 47mm x
- Aluminium housing
- · Polycarbonate lens

CKO-LED-WL602-F

Square Work Lamp 9 LED Flood



CKO-LED-WL605-F

Circular Work Lamp 9 LED Flood



- · Colour: White
- Lumens: 1400
- Beam Pattern: Flood
- Approval: ECE R10
- Fixing: Bolt Bracket
- IP Rating: IP67
- LEDs: 9
- Dimensions: 108mm x 125mm x
- 45mm
- · Aluminium housing
- Voltage: 12-80V PMMA lens



- Colour: White
- Lumens: 1400
- Beam Pattern: Flood
- Approval: ECE R10
- Fixing: Bolt Bracket
- Voltage: 12-80V

- IP Rating: IP67
- LEDs: 9
- Dimensions: 115mm x 126mm x 50mm
- · Aluminium housing
- PMMA lens





Square Work Lamp 25 LED Flood



CKO-LED-WL606-F

Circular Work Lamp 9 LED Flood with **Magnetic Base**



128



127

- Colour: White
- Lumens: 5625
- Beam Pattern: Flood
- Approval: ECE R10
- Fixing: Bolt Bracket
- Voltage: 12-36V

- IP Rating: IP67
- LEDs: 25
- Dimensions: 135mm x 108mm x 55mm
- Aluminium housing
- Polycarbonate lens



- Colour: White
- Lumens: 1400
- Beam Pattern: Flood
- Approval: ECE R10
- Fixing: Magnetic Base
- Voltage: 12-80V
- IP Rating: IP67

- LEDs: 9
- Dimensions: 115mm x 126mm x
- Aluminium housing
- PMMA lens
- Cigarette adaptor plug
- Removable handle

PRODUCT CATALOGUE CALL 02088638333 CALL 02088638333 PRODUCT CATALOGUE sales@c-ko.co.uk sales@c-ko.co.uk



INTERIOR LIGHTING





Interior Light 300mm 30 LED with PIR 12V





- Colour: White 6000K
- Lumens: 400
- Fixing: Mounting Clip x 2
- Voltage: 12V
- IP Rating: IP65
- LEDs: 30

- Dimensions: 300mm
- Frosted diffuser lens
- PIR Sensor to detect motion and turn on light
- Aluminium Housing



Interior Light 500mm 54 LED with PIR 12V





- Colour: White 6000K
- Lumens: 800
- Fixing: Mounting Clip x 2
- Voltage: 12V
- IP Rating: IP65
- LEDs: 54

- Dimensions: 500mm
- Frosted diffuser lens
- PIR Sensor to detect motion and turn on light
- Aluminium Housing

CKO-LED-INT1000-PIR-12V

Interior Light 1000mm 114 LED with PIR 12V



130





- Colour: White 6000K
- Lumens: 1600
- Fixing: Mounting Clip x 2
- Voltage: 12V
- IP Rating: IP65
- LEDs: 114

- Dimensions: 1000mm
- Frosted diffuser lens
- PIR Sensor to detect motion and turn on light
- Aluminium Housing

sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

TROUGHT CALL SECTION OF THE PROPERTY OF THE PR

INTERIOR LIGHTING



INTERIOR LIGHTING









CKO-LED-INT173-PIR







Interior Light 1000mm 114 LED with PIR 24V

Voltage: 24V



Interior Light Round 130mm 87 LED with PIR

• PIR Sensor to detect motion and turn on light



Interior Light 173mm 22 LED with PIR

PIR Sensor to detect motion and turn on light



Interior Light 173mm 22 LED with Switch

Touch switch next to lens

CKO-LED-INT130-DV

Interior Light Round 130mm 87 LED



CKO-LED-INT300-DV

Interior Light 300mm 54 LED





- Colour: White 5700-6500K
- Lumens: 1200
- Fixing: SurfaceVoltage: 10-30V
- IP Rating: IP67

- LEDs: 87
- Dimensions: 130mm x 12mm
- White polymer housing with frosted lens



- Colour: White 5700-6500K
- Lumens: 756
- · Fixing: Surface
- Voltage: 10-30VIP Rating: IP67

- LEDs: 54
- Dimensions: 300mm x 57mm x14.5mm
- White polymer housing with frosted lens

CKO-LED-INT173-DV

Interior Light 173mm 22 LED



CKO-LED-INT300-PIR





132



- Colour: White 5700-6500K
- Lumens: 308
- Fixing: Surface
- Voltage: 10-30V
- IP Rating: IP67

- LEDs: 22
- Dimensions: 173mm x 57mm x
 14.5mm
- White polymer housing with frosted lens



Interior Light 300mm 54 LED with PIR

 PIR Sensor to detect motion and turn on light



Interior Light 300mm 54 LED with Switch

· Touch switch next to lens

PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk sales@c-ko.co.uk CALL 02088638333 PRODUCT CATALOGUE

INTERIOR LIGHTING



INTERIOR LIGHTING





Interior Light 600mm 130 LED



CKO-LED-INT510-DV

Interior Light 522mm 30 LED



- Colour: White 5700-6500K
- Lumens: 1820
- Fixing: Surface
- Voltage: 10-30V
- IP Rating: IP67

- LEDs: 130
- Dimensions: 600mm x 57mm x 14.5mm
- · White polymer housing with frosted lens



- Lumens: 600
- Fixing: Surface
- Voltage: 12-24V
- IP Rating: IP67

- LEDs: 30
- Dimensions: 522mm
- Aluminium Housing
- Silicone Seal

CKO-LED-INT600-PIR
















- Interior Light 600mm 130 LED with Switch
- PIR Sensor to detect motion and turn on Touch switch next to lens









Interior Light 300mm 18 LED






- Colour: White 6000K
- Lumens: 360
- Fixing: Surface
- Voltage: 12-24V
- IP Rating: IP67

- LEDs: 18
- Dimensions: 300mm
- Aluminium Housing
- Silicone Seal

CKO-LED-INT1000-DV





- Colour: White 6000K
- Lumens: 1000
- Fixing: Surface
- Voltage: 12-24V
 - IP Rating: IP67

- LEDs: 60
- Dimensions: 1000mm
- Aluminium Housing
- Silicone Seal

PRODUCT CATALOGUE CALL 02088638333 CALL 02088638333 PRODUCT CATALOGUE sales@c-ko.co.uk sales@c-ko.co.uk

WARNING LIGHTING

CKO-CWL1 Cycle Warning Light



- Voltage: 10-30V DC
- Dimensions: 160mm x 160mm
- IP Rate: 68
- Max. Operation Temperature: +60°C
- Housing: Black PC
- LED Chips: 33pcs amber, 33pcs red
- Watt: 0.3W/LED
- Cable: PVC
- Wire Length: 150cm
- Colour: White and Amber
- Light sensor to increase brightness in day light



THE VEHICLE SAFETY EXPERTS

Skip the Wait, Collect Your Order Today!



Why wait around for delivery when you can collect and Distribution Centre in Manchester makes it easy. Once your order is processed, just swing by our trade counter and pick up everything you need without the delay. We're open from 8:00 AM to 4:30 PM, Monday to Friday.

With a huge range of stock on hand, CKO helps you get your order the very same day? At CKO, our Warehouse back on the job fast. It's the perfect solution if you're nearby and need vehicle safety products in a hurry. Find us at Unit A, The Court, Kestrel Road, Trafford Park, Manchester, M17 1SF - your quick and easy collection point.

Contact the CKO sales team to find out more.

Call 0208 863 8333 (Option 1)



PRODUCT CATALOGUE CALL 02088638333 sales@c-ko.co.uk



Nationwide, Professional Vehicle Installations



CKO have proudly partnered with Handsfree Group to All our engineers are The Association of Vehicle customers. With an extensive network of mobile purchase can be installed into your vehicles at a location that is convenient to you - any time, day or night.

Installers (AVI) accredited and have received the City & Guilds Level 2 Award in the Safe Maintenance of Electric engineers, the vehicle safety equipment that you and Hybrid Vehicles. This comprehensive skill set guarantees the utmost quality in our services, offering you unparalleled peace of mind.

Contact the CKO sales team to find out more.

Call 0208 863 8333 (Option 1)





MEET THE TEAM



The Vehicle Safety Experts

At CKO, our passion lies in helping our customers to discover the perfect product or package to fulfill their vehicle safety needs. With a dedicated team working diligently behind the scenes, we strive to exceed our customers' expectations by delivering tailored solutions that prioritise safety and satisfaction.

Sales

With years of industry experience and a wealth of knowledge, our sales team members are experts in vehicle safety and compliance. They are ready to help you navigate regulations, recommend the best solutions, and ensure that you achieve your safety and compliance goals with confidence.

Technical

Serving as the backbone of our operations, our technical team stand ready to support both our sales team and our valued customers alike. With a deep understanding of our products and services, they possess the capability to address any technical inquiries our customers may have, ensuring an exceptional experience.

Accounts

Comprised of diligent professionals with a wealth of financial expertise, our accounts team are committed to providing exemplary service to our valued clients. From managing billing inquiries to resolving payment issues, our accounts team works tirelessly to guarantee customer satisfaction and foster long-term relationships.







CKO Vehicle Safety Experts

6 Lumsdale Road, Cobra Court, Trafford Park, Manchester, M32 0UT

+44 (0) 208 863 8333

www.c-ko.co.uk sales@c-ko.co.uk









