

## Product Specification



### CKO-LED-711-B-A Amber Light Bar 600mm Bolt Mounted



CKO-LED-711-B-A

#### KEY FEATURES

- Light Colour: Amber
- Lens: Clear
- Fixing: Bolt Bracket
- Approval: ECE R10/R65 Approved
- Voltage: 12-24V
- IP Rating: IP67
- LEDs: 108
- Patterns: 27 Selectable Flash Patterns
- Additional: Cable with switch included
- Dimensions: 600mm x 100mm x 45mm
- Tough polycarbonate lens with UV resistance
- Aluminium base
- Reverse polarity protection
- Clear Lens
- -30°C to +60°C operating temperature

**FOR MORE INFORMATION, CONTACT OUR SALES TEAM.**

**T:** 020 8863 8333 (OPT1) • **E:** sales@c-ko.co.uk • **W:** www.c-ko.co.uk


# Product Specification



## Amber Light Bar 600mm Bolt Mounted

### Wiring Information

- **Red:** Power
- **Black:** Ground
- **Yellow:** Flash Pattern Programming / Dimming
- **White:** Synchronisation - connect to other light bar
- **Blue:** Middle to side arrowstick - connect to red permanently
- **Brown:** Right arrowstick - connect to red permanently
- **Green:** Left arrowstick - connect to red permanently

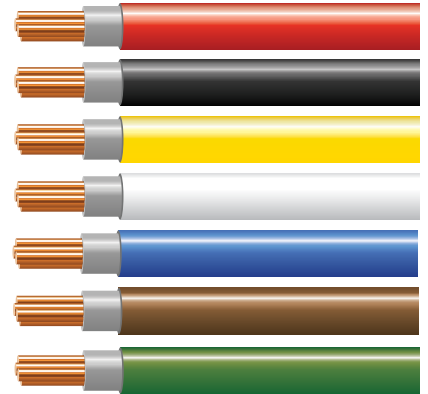

### Flash Pattern Information

Tap yellow wire to red wire for under 1 second to change to next pattern, 1-3 seconds for previous pattern and over 5 seconds to activate 50% dimming function, repeat 5 the over 5 second tap on red wire to disengage the dimming function.

- |                            |  |
|----------------------------|--|
| 1. Single R65              | 15. Right Constant                       |
| 2. Double R65              | 16. Left Constant                        |
| 3. Triple                  | 17. Middle to Side Constant              |
| 4. Quad R65                | 18. One - One Eight Fast                 |
| 5. Single Slow             | 19. One - One Single                     |
| 6. Single Half to Half R65 | 20. One - One Single - Split Accelerate  |
| 7. Double Half to Half R65 | 21. Centre Out Quad                      |
| 8. Triple Half to Half     | 22. Centre Out Single - Split Accelerate |
| 9. Quad Half to Half       | 23. End Octa - Half to Half              |
| 10. Half to Half + All     | 24. Out Steady On - Centre Double        |
| 11. Single + Quad          | 25. One Steady On - One Single           |
| 12. Right Arrowstick       | 26. Cycle (6,19,9,18,21,2)               |



**Warning:** Avoid looking directly at LEDs while they are in operation. Doing so may result in temporary vision impairment or permanent eye damage.

**FOR MORE INFORMATION, CONTACT OUR SALES TEAM.**

**T:** 020 8863 8333 (OPT1) • **E:** sales@c-ko.co.uk • **W:** www.c-ko.co.uk